



CE EMC TEST REPORT

Applicant	: TPV Electronics (Fujian) Co., Ltd.
Address	: Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Equipment under Test	: LCD Monitor
Model No.	: **34E4***** (*" = 0-9, A-Z, a-z, +, -, /, \ or blank)
Report No.	: DDT-B25070701-1E01
Issue Date	: Jul. 17, 2025
Issued By	: Tianjin Dongdian Testing Service Co., Ltd.
Address	: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park, Development Area, Tianjin, China. Tel: +86-022-58038033, E-mail: rui.zhang@ddt-test.com, http://www.ddttest.com



REPORT

CONTENTS

1 Summary of Test Results	6
2 General Test Information	8
2.1 Description of EUT	8
2.2 Primary Function of EUT	8
2.3 Port of EUT	8
2.4 Accessories of EUT	9
2.5 Test peripherals	9
2.6 Block diagram EUT configuration for test	10
2.7 EUT operating mode(s)	10
2.8 Performance Criteria	11
2.9 Deviations of test standard	11
2.10 Test laboratory	12
2.11 Measurement uncertainty	12
2.12 Abbreviations	12
3 Conducted Emissions (AC mains power ports)	13
3.1 General Information	13
3.2 Test Equipment	13
3.3 Reference Standard	13
3.4 Test Arrangement	13
3.5 Test Specification and Limit	15
3.6 Test Result	15
4 Conducted Emissions (asymmetric mode)	17
4.1 General Information	17
4.2 Test Equipment	17
4.3 Reference Standard	17
4.4 Test Arrangement	18
4.5 Test Specification and Limit	20
4.6 Test Result	20
5 Radiated Emissions (30MHz to 1GHz)	23
5.1 General Information	23
5.2 Test Equipment	23
5.3 Reference Standard	23
5.4 Test Arrangement	24
5.5 Test Specification and Limit	26
5.6 Test Result	26
6 Radiated Emissions (Above 1GHz)	28
6.1 General Information	28
6.2 Test Equipment	28
6.3 Reference Standard	28
6.4 Test Arrangement	29
6.5 Test Specification and Limit	31
6.6 Test Result	31
7 Harmonic Current Emissions	33
7.1 General Information	33
7.2 Test Equipment	33
7.3 Reference Standard	33
7.4 Test Arrangement	33
7.5 Test Specification and Limit	34
7.6 Test Result	34
8 Voltage Changes, Voltage Fluctuations and Flicker	36
8.1 General Information	36
8.2 Test Equipment	36
8.3 Reference Standard	36
8.4 Test Arrangement	36
8.5 Test Specification and Limit	37
8.6 Test Result	37

9 Electrostatic Discharge Immunity	39
9.1 General Information	39
9.2 Test Equipment.....	39
9.3 Reference Standard.....	39
9.4 Test Arrangement	39
9.5 Test Specification and Limit.....	40
9.6 Test Result.....	40
10 Radiated, Radio-frequency, Electromagnetic Field Immunity.....	43
10.1 General Information	43
10.2 Test Equipment.....	43
10.3 Reference Standard.....	43
10.4 Test Arrangement	44
10.5 Test Specification and Limit.....	44
10.6 Test Result.....	45
11 Electrical Fast Transient/Burst Immunity	46
11.1 General Information	46
11.2 Test Equipment.....	46
11.3 Reference Standard.....	46
11.4 Test Arrangement	46
11.5 Test Specification and Limit.....	47
11.6 Test Result.....	48
12 Surge Immunity	49
12.1 General Information	49
12.2 Test Equipment.....	49
12.3 Reference Standard.....	49
12.4 Test Arrangement	50
12.5 Test Specification and Limit.....	50
12.6 Test Result.....	51
13 Immunity to Conducted Disturbances, Induced by Radio-frequency Fields	53
13.1 General Information	53
13.2 Test Equipment.....	53
13.3 Reference Standard.....	53
13.4 Test Arrangement	54
13.5 Test Specification and Limit.....	55
13.6 Test Result.....	55
14 Power Frequency Magnetic Field Immunity	56
14.1 General Information	56
14.2 Test Equipment.....	56
14.3 Reference Standard.....	56
14.4 Test Arrangement	56
14.5 Test Specification and Limit.....	57
14.6 Test Result.....	57
15 Voltage Dips, Short Interruptions and Voltage Variations Immunity.....	58
15.1 General Information	58
15.2 Test Equipment.....	58
15.3 Reference Standard.....	58
15.4 Test Arrangement	58
15.5 Test Specification and Limit.....	59
15.6 Test Result.....	59
Annex A.Test Setup Photos	60

Test Report Declare

Applicant	:	TPV Electronics (Fujian) Co., Ltd.
Address	:	Rongqiao Economic and Technological Development Zone, Fuqing City, Fujian Province, P.R. China
Equipment under Test	:	LCD Monitor
Model No.	:	**34E4***** (**" = 0-9, A-Z, a-z, +, -, /, \ or blank)

Test Standard Used:

AS/NZS CISPR 32:2015,AS/NZS CISPR 32:2015 AMD 1:2020,BS EN 55032:2015,BS EN 55032:2015+A11:2020,BS EN 55032:2015+A1:2020,BS EN 55035:2017+A11:2020,BS EN 61000-3-3:2013,BS EN 61000-3-3:2013+A1:2019,BS EN 61000-3-3:2013+A2:2021,BS EN IEC 61000-3-2:2019+A1:2021,BS EN IEC 61000-3-2:2019+A2:2024,CISPR 32:2015,CISPR 32:2015/AMD1:2019,CISPR 35:2016,EN 55032:2015,EN 55032:2015/A11:2020,EN 55032:2015/A1:2020,EN 55035:2017,EN 55035:2017/A11:2020,EN 61000-3-2:2014,EN 61000-3-3:2013,EN 61000-3-3:2013/A1:2019,EN 61000-3-3:2013/A2:2021,EN 61000-3-3:2013/A2:2021/AC:2022-01,EN IEC 61000-3-2:2019,EN IEC 61000-3-2:2019/A1:2021,EN IEC 61000-3-2:2019/A2:2024,IEC 61000-4-2:2025,IEC 61000-4-3:2020,IEC 61000-4-4:2012,IEC 61000-4-5:2014+AMD1:2017 CSV,IEC 61000-4-6:2023,IEC 61000-4-8:2009, IEC 61000-4-11:2020/COR2:2022

We Declare:

The equipment described above is tested and assessed by Tianjin Dongdian Testing Service Co., Ltd. and in the configuration assessed the equipment complied with the standards specified above. The tested and assessed results are contained in this test report and Tianjin Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these assessments.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above standards.

Report No.:	DDT-B25070701-1E01	
Date of Receipt:	Jul. 09, 2025	Date of Test: Jul. 11, 2025-Jul. 16, 2025

Prepared By:



Novak Wei
Novak Wei/Engineer

Approved By:
Inspection & Testing Services

Aaron Zhang
Aaron Zhang/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Tianjin Dongdian Testing Service Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Revision History

Rev	Revisions	Issue Date	Revised By
---	<p>Remark: This test report is not valid without the original test report. This test report DDT-B25070701-1E01(add model with new mainboard) base on original test report no DDT-B25033116-1E01.</p>	Jul. 17, 2025	

1 Summary of Test Results

Description of Test Item	Standard	Result
Conducted Emissions (AC mains power ports)	EN 55032:2015, EN 55032:2015/A11:2020, EN 55032:2015/A1:2020, BS EN 55032:2015+A1:2020, BS EN 55032:2015, BS EN 55032:2015+A11:2020, CISPR 32:2015, CISPR 32:2015/AMD1:2019, AS/NZS CISPR 32:2015, AS/NZS CISPR 32:2015 AMD 1:2020	Pass
Conducted Emissions (asymmetric mode)	EN 55032:2015, EN 55032:2015/A11:2020, EN 55032:2015/A1:2020, BS EN 55032:2015+A1:2020, BS EN 55032:2015, BS EN 55032:2015+A11:2020, CISPR 32:2015, CISPR 32:2015/AMD1:2019, AS/NZS CISPR 32:2015, AS/NZS CISPR 32:2015 AMD 1:2020	Pass
Radiated Emissions (30MHz to 1GHz)	EN 55032:2015, EN 55032:2015/A11:2020, EN 55032:2015/A1:2020, BS EN 55032:2015+A1:2020, BS EN 55032:2015, BS EN 55032:2015+A11:2020, CISPR 32:2015, CISPR 32:2015/AMD1:2019, AS/NZS CISPR 32:2015, AS/NZS CISPR 32:2015 AMD 1:2020	Pass
Radiated Emissions (Above 1GHz)	EN 55032:2015, EN 55032:2015/A11:2020, EN 55032:2015/A1:2020, BS EN 55032:2015+A1:2020, BS EN 55032:2015, BS EN 55032:2015+A11:2020, CISPR 32:2015, CISPR 32:2015/AMD1:2019, AS/NZS CISPR 32:2015, AS/NZS CISPR 32:2015 AMD 1:2020	Pass
Harmonic Current Emissions	EN 61000-3-2:2014, EN IEC 61000-3-2:2019/A1:2021, EN IEC 61000-3-2:2019/A2:2024, EN IEC 61000-3-2:2019, BS EN IEC 61000-3-2:2019+A1:2021, BS EN IEC 61000-3-2:2019+A2:2024,	Pass
Voltage Changes, Voltage Fluctuations and Flicker	EN 61000-3-3:2013, EN 61000-3-3:2013/A1:2019, EN 61000-3-3:2013/A2:2021, EN 61000-3-3:2013/A2:2021/AC:2022-01, BS EN 61000-3-3:2013, BS EN 61000-3-3:2013+A1:2019, BS EN 61000-3-3:2013+A2:2021,	Pass

Electrostatic Discharge Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-2:2025	Pass
Radiated, Radio-frequency, Electromagnetic Field Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-3:2020	Pass
Electrical Fast Transient/Burst Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-4:2012	Pass
Surge Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-5:2014+AMD1:2017 CSV	Pass
Immunity to Conducted Disturbances, Induced by Radio- frequency Fields	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-6:2023	Pass
Power Frequency Magnetic Field Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-8:2009	Pass
Voltage Dips, Short Interruptions and Voltage Variations Immunity	EN 55035:2017, EN 55035:2017/A11:2020, BS EN 55035:2017+A11:2020, CISPR 35:2016, IEC 61000-4-11:2020/COR2:2022	Pass

2 General Test Information

2.1 Description of EUT

EUT Name	:	LCD Monitor
Model Number	:	**34E4***** (** = 0-9, A-Z, a-z, +, -, /, \ or blank)
Model Differences	:	All models difference is in sale marketing.
Serial Number	:	N/A
Test Model	:	CU34E4CW
Sample No.	:	Y25070701-01
Power supply	:	AC 100-240V ~ 50/60Hz
Test Power supply	:	AC 230V 50Hz, 110V 60Hz
EUT Class	:	Class B
Maximum work frequency	:	768.5 MHz

2.2 Primary Function of EUT

Function	Description
Broadcast reception function	N/A
Print	N/A
Scan	N/A
Display or display output	Display
Musical tone generating	N/A
Networking	Data transmission
Audio output	Audio output function (internal speaker & audio output port)
Telephony	N/A
Bluetooth	N/A
Other	N/A

2.3 Port of EUT

Port	Description
AC mains power ports	AC mains power port
DC network power port	N/A
Wired network port	One LAN port
Signal data/control port	Two HDMI in Ports, One DP in Port, One USB-C in Port, Four USB-A Ports, One USB-C Port,
Antenna port	N/A
Broadcast receiver tuner port	N/A
Audio output port	One Audio out Port, Two Speakers
Video output port	N/A
Other	N/A


2.4 Accessories of EUT

Accessories	Manufacturer	Model No.	Description	Remark
AC Cable	N/A	N/A	Length: 1.2m/1.5m/1.8m, Unshielded	N/A
DP Cable	N/A	N/A	Length: 1.2m/1.5m/1.8m, Shielded	N/A
HDMI Cable	N/A	N/A	Length: 1.2m/1.5m/1.8m, Shielded	N/A
Type-C Cable	N/A	N/A	Length: 1.2m/1.5m/1.8m, Shielded	N/A
Audio Cable	N/A	N/A	Length: 1.2m/1.5m/1.8m, Shielded	N/A

2.5 Test peripherals

Device	Manufacturer	Model No.	Description	Remark
DVD	PHILIPS	TAEP200/93	HCPE2025000750	N/A
Hard Disk	TOSHIBA	DTB410	2157T08BTLSH	N/A
Headphone	N/A	N/A	N/A	N/A
Keyboard	DELL	N/A	N/A	N/A
LAN Cable	N/A	N/A	N/A	Cat.5
LAN Cable	N/A	N/A	N/A	Cat.7
Laptop	Hewlett-Packard	HP ProBook 455R G6	#5CD0122F5D	N/A
Mouse	DELL	N/A	N/A	N/A
PC	LENOVO	GeekPro-14ACN	M70Q5KC0	N/A
PC	DELL	Vostro 5890	700SBD3	N/A
Printer	SAMSUNG	CLP-365W/SEE	Z8DLBABC200070K	N/A
Router	TP-LINK	WDR6500	1.173702008704E12	N/A
Smart Phone	SAMSUNG	SM-A5070	R58N422B1FX	N/A
Speaker	JBL	GO2+	N/A	N/A
USB Memory	N/A	N/A	N/A	N/A

2.6 Block diagram EUT configuration for test

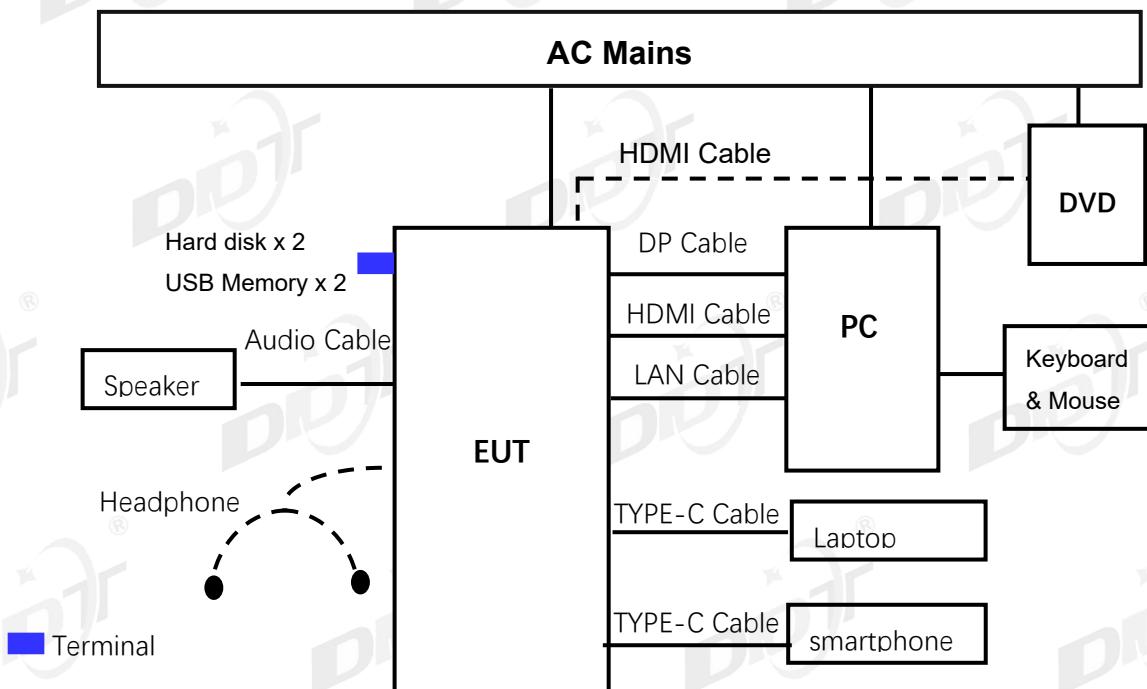

2.7 EUT operating mode(s)

Mode 1 HDMI1	Connect HDMI cable from PC's HDMI port to EUT's HDMI Port. Connect DP cable from PC's DP port to EUT's DP Port. Connect TYPE-C cable from laptop's TYPE-C port to EUT's TYPE-C Port. Connect hard disk and USB memory to EUT's USB-A port. Connect LAN cable from EUT's LAN out port to PC's LAN Port. Connect TYPE-C cable from EUT's TYPE-C data port to smartphone. Doing the ping test from laptop to PC. Turn on the camera. Switch source to HDMI1. The test signal is color bars with moving picture element according to ITU-R BT 471-1.
Mode 2 HDMI2	Connect HDMI cable from PC's HDMI port to EUT's HDMI Port. Connect DP cable from PC's DP port to EUT's DP Port. Connect TYPE-C cable from laptop's TYPE-C port to EUT's TYPE-C Port. Connect hard disk and USB memory to EUT's USB-A port. Connect LAN cable from EUT's LAN out port to PC's LAN Port. Connect TYPE-C cable from EUT's TYPE-C data port to smartphone. Doing the ping test from laptop to PC. Turn on the camera. Switch source to HDMI2. The test signal is color bars with moving picture element according to ITU-R BT 471-1.
Mode 3 DP	Connect HDMI cable from PC's HDMI port to EUT's HDMI Port. Connect DP cable from PC's DP port to EUT's DP Port. Connect TYPE-C cable from laptop's TYPE-C port to EUT's TYPE-C Port. Connect hard disk and USB memory to EUT's USB-A port. Connect LAN cable from EUT's LAN out port to PC's LAN Port. Connect TYPE-C cable from EUT's TYPE-C data port to smartphone. Doing the ping test from laptop to PC. Turn on the camera. Switch source to DP. The test signal is color bars with moving picture element according to ITU-R BT 471-1.
Mode 4 TYPE-C	Connect HDMI cable from PC's HDMI port to EUT's HDMI Port. Connect DP cable from PC's DP port to EUT's DP Port. Connect TYPE-C cable

	from laptop's TYPE-C port to EUT's TYPE-C Port. Connect hard disk and USB memory to EUT's USB-A port. Connect LAN cable from EUT's LAN out port to PC's LAN Port. Connect TYPE-C cable from EUT's TYPE-C data port to smartphone. Doing the ping test from laptop to PC. Turn on the camera. Switch source to TYPE-C. The test signal is color bars with moving picture element according to ITU-R BT 471-1.
--	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

2.8 Performance Criteria

Criterion	Description
A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
B	During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test. After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2.9 Deviations of test standard

[Standard deviation 1] Electrostatic discharge immunity test was done according to IEC 61000-4-2:2025 instead of IEC 61000-4-2:2008.

[Standard deviation 2] Radiated, radio-frequency, electromagnetic field immunity test was done according to IEC 61000-4-3:2020 instead of IEC 61000-4-3:2006+AMD1:2007+AMD2:2010.

[Standard deviation 3] Surge immunity test was done according to IEC 61000-4-5:2014+AMD1:2017 CSV instead of IEC 61000-4-5:2005.

[Standard deviation 4] Radio-frequency conducted immunity test was done according to IEC 61000-4-6:2023 instead of IEC 61000-4-6:2008.

[Standard deviation 5] Voltage dips, short interruptions and voltage variations immunity tests was done according to IEC 61000-4-11:2020/COR2:2022 instead of IEC 61000-4-11:2004.

2.10 Test laboratory

Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Tel: +86-22-58038033, <http://www.ddttest.com>, Email: ddt@dgddt.com

NVLAP (National Voluntary Laboratory Accreditation Program) CODE: 500036-0

CNAS (China National Accreditation Service for Conformity Assessment) CODE: L13402

FCC Designation Number: CN5004; FCC Test Firm Registration Number: 368676

ISED (Innovation, Science and Economic Development Canada) Company Number: 27768

Conformity Assessment Body Identifier: CN0125

VCCI Facility Registration Number: C-20089, T-20093, R-20125, G-20122

2.11 Measurement uncertainty

Test Item	Uncertainty
Conducted Emissions at Mains Power Port	3.4 dB (150KHz-30MHz)
Conducted Emissions at Telecommunication Port (ISN T800)	4.59 dB
Conducted Emissions at Telecommunication Port (ISN ST08)	3.5 dB
Radiated Emissions (30MHz to 1GHz)	5.2 dB (Antenna Polarize: Hor.) 5.2 dB (Antenna Polarize: Ver.)
Radiated Emissions (Above 1GHz)	5.0 dB
Harmonic Current Emissions	3.1 %
Voltage Changes, Voltage Fluctuations and Flicker	1.7 %

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

We have conducted the Electrostatic discharge, Electrical fast transient/burst, Surge, Voltage dips, short interruptions and voltage variations tests to check the uncertainty. Radiated, radio-frequency, electromagnetic field 5.4 dB. Conducted disturbances, induced by radio-frequency fields 1.1 dB.

2.12 Abbreviations

For the purposes of the present document, the following abbreviations apply:

EUT: Equipment Under Test

QP: Quasi-Peak

PK: Peak,

AV: Average

CAV: CISPR Average

CDN: Coupling Decoupling Network

AM: Amplitude Modulation

N/A: Not Applicable

3 Conducted Emissions (AC mains power ports)

3.1 General Information

Test date	Jul. 11, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	24.2°C	Relative humidity	50.5%
	Atmospheric pressure	101.0kPa		
Test place	Shield Room 2#			


3.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Two-Line V-Network	Rohde & Schwarz	ENV216	101122	Feb. 17, 2025	1 Year
Two-Line V-Network	Rohde & Schwarz	ENV216	101254	Feb. 17, 2025	1 Year
EMI Test Receiver	Rohde & Schwarz	ESCI	100375	Feb. 17, 2025	1 Year
Test Software	TOYO	EP5/CE	Ver 5.4.40	N/A	N/A
Impedance Stabilization Network	TESEQ	ISN T800	30844	Sep. 27, 2024	1 Year

3.3 Reference Standard

EN 55032:2015,
 EN 55032:2015/A11:2020,
 EN 55032:2015/A1:2020,
 BS EN 55032:2015+A1:2020,
 BS EN 55032:2015,
 BS EN 55032:2015+A11:2020,
 CISPR 32:2015,
 CISPR 32:2015/AMD1:2019,
 AS/NZS CISPR 32:2015,
 AS/NZS CISPR 32:2015 AMD 1:2020

3.4 Test Arrangement

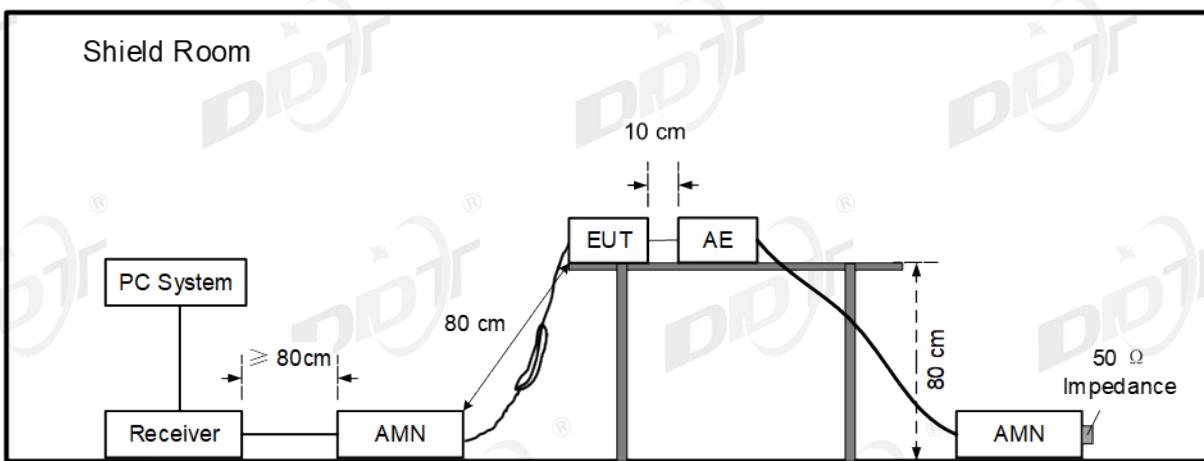

The EUT was placed on a non-metallic table, 80cm above the ground plane.

The EUT's power adapter was connected to the power mains through a line impedance stabilization network (AMN), which provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted disturbance.

The bandwidth of test receiver is set at 9 kHz.

The frequency range from 150 kHz to 30MHz is checked.

Pre-scan measurements were performed in all operating mode or resolution. But final measurements were performed in worst cases based on pre-scan measurements.

The EUT with following test modes were pre-tested:

No.	Test Voltage	Operation Mode	Cable Length	Resolution	Rotation	Stand Position	Audio
1.	230V 50Hz	Mode1 HDMI 1	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
2.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
3.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
4.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
5.			1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
6.			1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
7.			1.8m	DVD	Landscape	HAS Stand-up	External Speaker
8.		Mode2 HDMI 2	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
9.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
10.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
11.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
12.			1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
13.			1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
14.			1.8m	DVD	Landscape	HAS Stand-up	External Speaker
15.	Mode3 DP	Mode3 DP	1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
16.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
17.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
18.			1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
19.			1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
20.	Mode4 TYPE-C	Mode4 TYPE-C	1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
21.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
22.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
23.			1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
24.			1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker

25.		The worst case above with 1.8m power cord	Landscape	HAS Stand-up	External Speaker
26.		The worst case above with 1.5m power cord	Landscape	HAS Stand-up	External Speaker
27.		The worst case above with 1.2m power cord	Landscape	HAS Stand-up	External Speaker
28.		The worst case above with 1.8m power cord	Portrait (-90 degree)	HAS Stand-up	External Speaker
29.		The worst case above with 1.8m power cord	Portrait (-270 degree)	HAS Stand-up	External Speaker
30.		The worst case above with 1.8m power cord	Landscape	HAS Stand-down	External Speaker
31.		The worst case above with 1.8m power cord with scrolling "H" pattern	Landscape	HAS Stand-up	External Speaker
32.		The worst case 1920*1080@60Hz with 1.8m power cord	Landscape	HAS Stand-up	Without Headphone
33.		The worst case 1920*1080@60Hz with 1.8m power cord	Landscape	HAS Stand-up	With Headphone
34.		The worst case above with 1.8m power cord and Type C Max load	Landscape	HAS Stand-up	External Speaker
35.	110V 60Hz	The worst case above with 1.8m power cord	Landscape	HAS Stand-up	External Speaker

3.5 Test Specification and Limit

Class B

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

Note for test result

Note1): According pre-test, the worst test modes decided as below and reported. Only data of worst mode was reported in test result.

Note2) Line = Polarity of input power (Live or Neutral), N: Abbreviation of Neutral Polarity, L1: Abbreviation of Live Polarity,


Note3) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor,

Note4) Factor = AMN (or AAN) Insertion Loss + Cable Loss,

Note5) Margin = Limit – Level (Quasi-Peak and/or C/Average)

3.6 Test Result

Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 1 HDMI1	Pre-scan measurement	Pass
Y25070701-01	Mode 2 HDMI2	Pre-scan measurement	Pass
Y25070701-01	Mode 3 DP	Pre-scan measurement	Pass
Y25070701-01	Mode 4 TYPE-C	Final measurement, minimum margin 5.4 dB	Pass

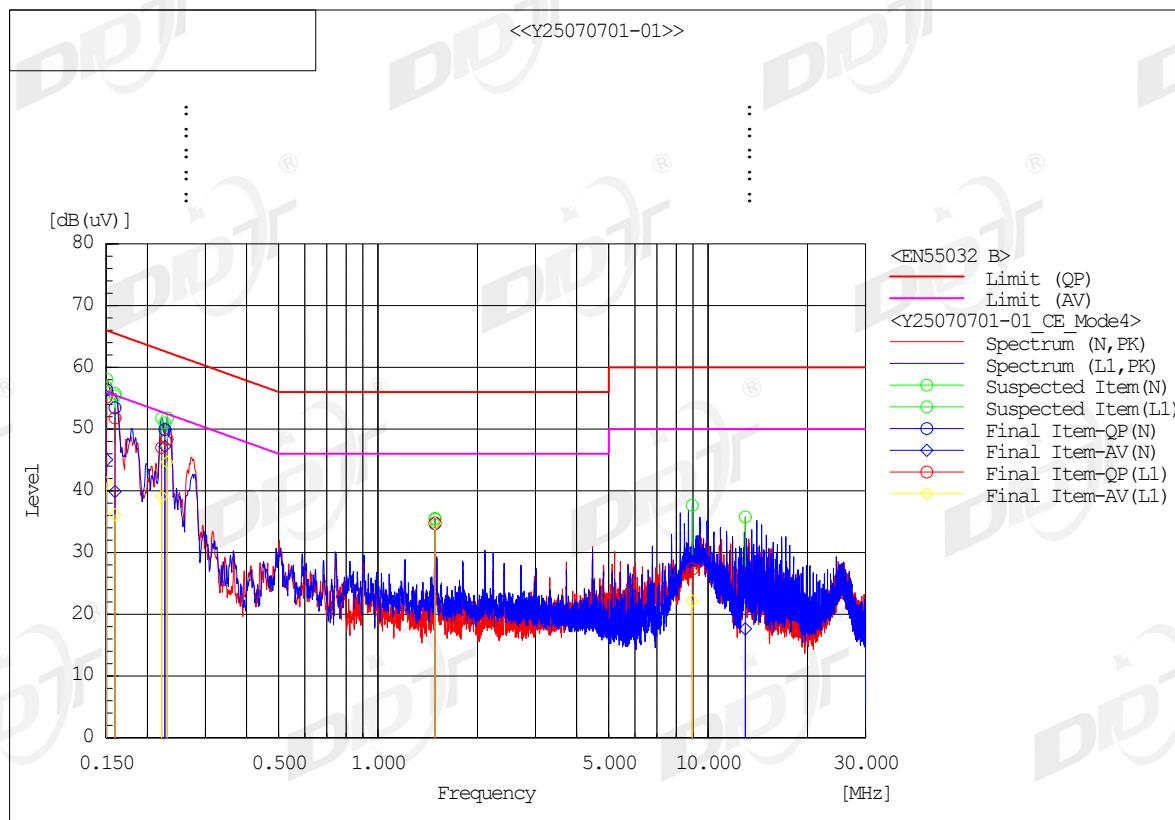

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15051	46.5	35.2	9.8	56.3	45.0	66.0	56.0	9.7	11.0
2	0.15969	43.7	30.1	9.8	53.5	39.9	65.5	55.5	12.0	15.6
3	0.22604	40.1	37.4	9.8	49.9	47.2	62.6	52.6	12.7	5.4
4	1.48816	24.8	24.8	9.9	34.7	34.7	56.0	46.0	21.3	11.3
5	12.96883	12.7	7.5	10.1	22.8	17.6	60.0	50.0	37.2	32.4

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.15006	45.4	31.5	9.8	55.2	41.3	66.0	56.0	10.8	14.7
2	0.15947	42.0	26.3	9.8	51.8	36.1	65.5	55.5	13.7	19.4
3	0.22094	37.2	29.3	9.8	47.0	39.1	62.8	52.8	15.8	13.7
4	0.22953	38.6	34.8	9.8	48.4	44.6	62.5	52.5	14.1	7.9
5	1.48738	24.9	24.8	9.9	34.8	34.7	56.0	46.0	21.2	11.3
6	8.96011	17.2	12.1	10.1	27.3	22.2	60.0	50.0	32.7	27.8

4 Conducted Emissions (asymmetric mode)

4.1 General Information

Test date	Jul. 11, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	24.2°C	Relative humidity	50.5%
	Atmospheric pressure	101.0kPa		
Test place	Shield Room 2#			


4.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Two-Line V-Network	Rohde & Schwarz	ENV216	101122	Feb. 17, 2025	1 Year
Two-Line V-Network	Rohde & Schwarz	ENV216	101254	Feb. 17, 2025	1 Year
Impedance Stabilization Network	TESEQ	ISN T800	30844	Sep. 27, 2024	1 Year
Impedance Stabilization Network	TESEQ	ISN ST08	33992	Feb. 17, 2025	1 Year
Test Software	TOYO	EP5/CE	Ver 5.4.40	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESCI	100375	Feb. 17, 2025	1 Year

4.3 Reference Standard

EN 55032:2015,
EN 55032:2015/A11:2020,
EN 55032:2015/A1:2020,
BS EN 55032:2015+A1:2020,
BS EN 55032:2015,
BS EN 55032:2015+A11:2020,
CISPR 32:2015,
CISPR 32:2015/AMD1:2019,
AS/NZS CISPR 32:2015,
AS/NZS CISPR 32:2015 AMD 1:2020

4.4 Test Arrangement

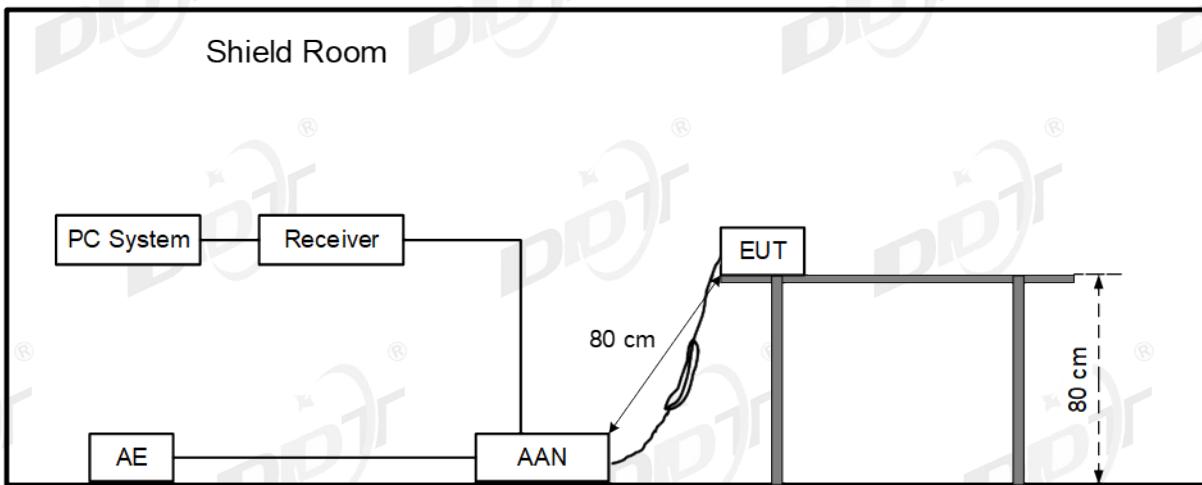

The EUT was placed on a 0.8m high non-metallic table in shielded room.

Connect ISN directly to reference ground plane.

The measured voltage at the measurement port of the ISN should correct the reading by adding the voltage division factor of the ISN, and compare to the voltage limit.

For Local Area Network (LAN) device, in order to make reliable emission measurements representative of high LAN utilization it is only necessary to create a condition of LAN utilization in excess of 10 % and sustain that level for a minimum of 250 ms. The content of the test traffic should consist of both periodic and pseudo-random messages in order to emulate realistic types of data transmission (e.g. random: files compressed or encrypted; periodic: uncompressed graphic files, memory dumps, screen updates, disk images). If the LAN maintains transmission during idle periods measurements shall also be made during idle periods.

When disturbance voltage measurements are performed on a single unscreened balanced pair, an adequate ISN for two wires shall be used; when performed on unscreened cables containing two balanced pairs, an adequate ISN for four wires shall be used.

The EUT with following test modes were pre-tested:

No.	Test Voltage	Operation Mode	Cable Length	Resolution	Rotation	Stand Position	Audio
1.	230V 50Hz	Mode1 HDMI 1	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
2.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
3.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
4.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
5.			1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
6.			1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
7.			1.8m	DVD	Landscape	HAS Stand-up	External Speaker
8.		Mode2 HDMI 2	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
9.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
10.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
11.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker

12.	Mode3 DP	1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
13.		1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
14.		1.8m	DVD	Landscape	HAS Stand-up	External Speaker
15.		1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
16.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
17.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
18.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
19.		1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
20.		1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
21.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
22.	Mode4 TYPE-C	1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
23.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
24.		1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
25.		The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker
26.		The worst case above with 1.5m power cord		Landscape	HAS Stand-up	External Speaker
27.	The worst case above with 1.2m power cord		Landscape	HAS Stand-up	External Speaker	
28.	The worst case above with 1.8m power cord		Portrait (-90 degree)	HAS Stand-up	External Speaker	
29.	The worst case above with 1.8m power cord		Portrait (-270 degree)	HAS Stand-up	External Speaker	
30.	The worst case above with 1.8m power cord		Landscape	HAS Stand- down	External Speaker	
31.	The worst case above with 1.8m power cord with scrolling "H" pattern		Landscape	HAS Stand-up	External Speaker	
32.	The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	Without Headphone	
33.	The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	With Headphone	
34.	The worst case above with 1.8m power cord and Type C Max load		Landscape	HAS Stand-up	External Speaker	
35.	110V 60Hz	The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker

4.5 Test Specification and Limit

Class B

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	84 ~ 74*	74 ~ 64*
500kHz ~ 30MHz	74	64

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

Note for test result

Note1): According pre-test, the worst test modes decided as below and reported. Only data of worst mode was reported in test result.

Note2) Line = Polarity of input power (Live or Neutral), N: Abbreviation of Neutral Polarity, L1: Abbreviation of Live Polarity,


Note3) Level (Quasi-Peak and/or C/Average) = Meter Reading + Factor,

Note4) Factor = AMN (or AAN) Insertion Loss + Cable Loss,

Note5) Margin = Limit – Level (Quasi-Peak and/or C/Average)

4.6 Test Result


Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 4 TYPE-C	Cat-5 Final measurement, minimum margin 15.0 dB	Pass
Y25070701-01	Mode 4 TYPE-C	Cat-7 Final measurement, minimum margin 12.1 dB	Pass

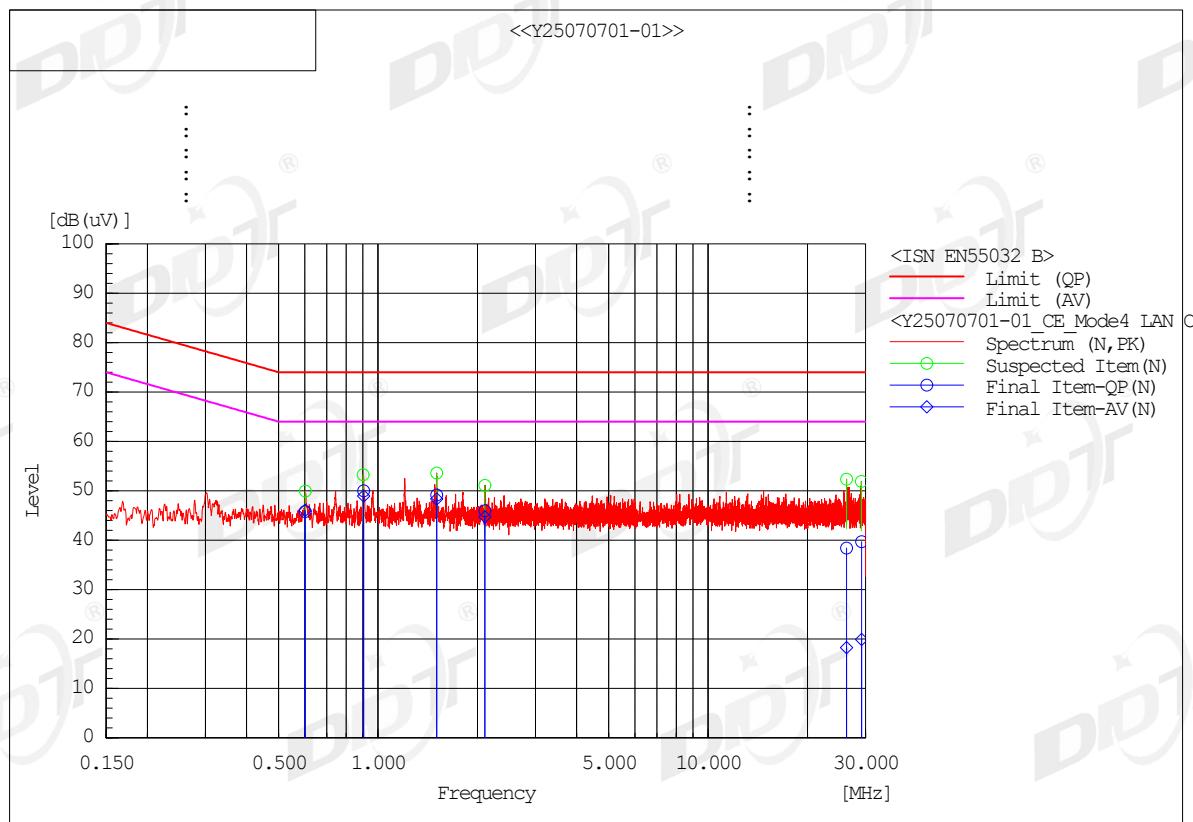

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.90456	40.2	39.2	9.8	50.0	49.0	74.0	64.0	24.0	15.0
2	1.50479	39.3	38.4	9.9	49.2	48.3	74.0	64.0	24.8	15.7
3	0.60123	35.9	36.2	9.9	45.8	46.1	74.0	64.0	28.2	17.9
4	2.10755	36.0	34.8	9.9	45.9	44.7	74.0	64.0	28.1	19.3
5	29.19585	29.3	9.5	10.4	39.7	19.9	74.0	64.0	34.3	44.1
6	26.25555	28.1	8.0	10.3	38.4	18.3	74.0	64.0	35.6	45.7

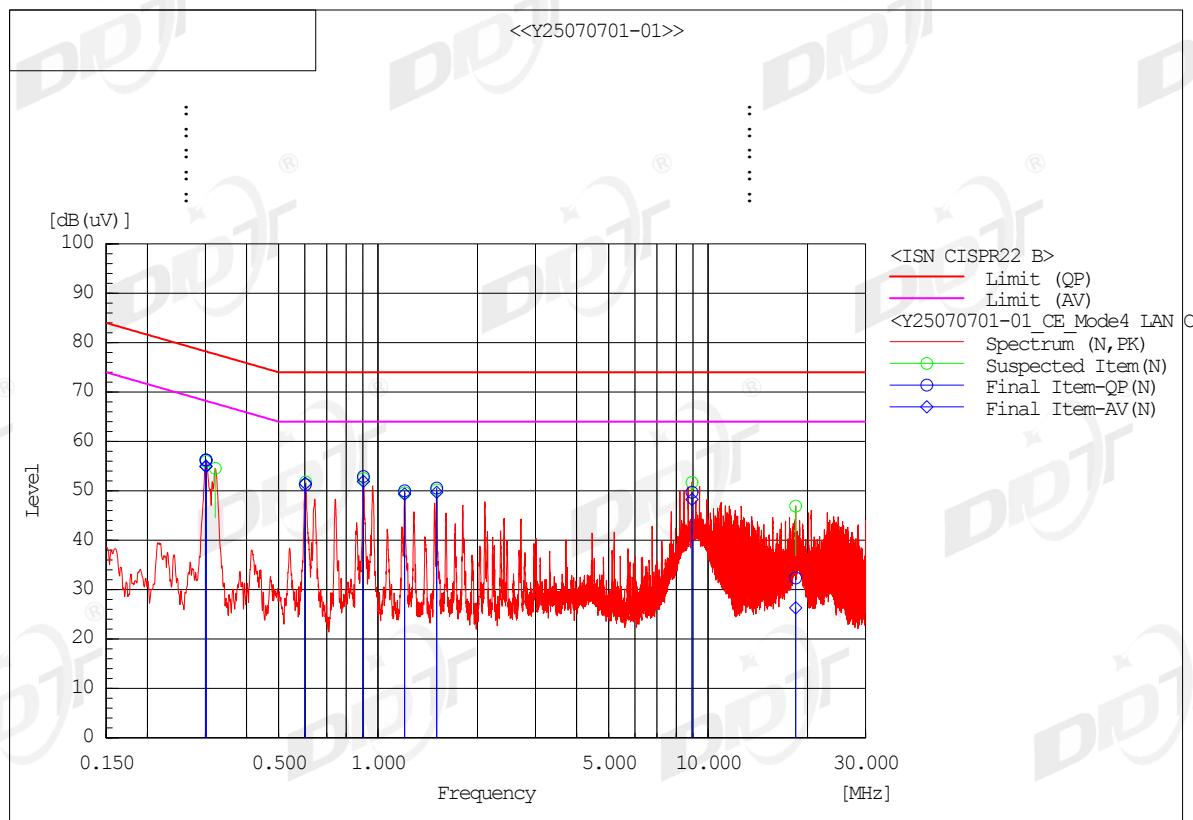

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading QP [dB(uV)]	Reading CAV [dB(uV)]	c.f.	Result QP [dB]	Result CAV [dB(uV)]	Limit QP [dB(uV)]	Limit AV [dB(uV)]	Margin QP [dB]	Margin CAV [dB]
1	0.30108	46.3	45.1	9.9	56.2	55.0	78.2	68.2	22.0	13.2
2	0.30158	46.3	45.0	9.9	56.2	54.9	78.2	68.2	22.0	13.3
3	0.60252	41.3	41.6	9.9	51.2	51.5	74.0	64.0	22.8	12.5
4	0.90305	43.0	42.0	9.9	52.9	51.9	74.0	64.0	21.1	12.1
5	1.20375	40.0	39.3	10.0	50.0	49.3	74.0	64.0	24.0	14.7
6	1.50511	40.6	39.7	10.0	50.6	49.7	74.0	64.0	23.4	14.3
7	8.94055	39.5	38.1	10.2	49.7	48.3	74.0	64.0	24.3	15.7
8	18.43085	21.7	15.7	10.6	32.3	26.3	74.0	64.0	41.7	37.7

5 Radiated Emissions (30MHz to 1GHz)

5.1 General Information

Test date	Jul. 14, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	24.5°C	Relative humidity	55.4%
	Atmospheric pressure	100.5kPa		
Test place	10m Chamber			


5.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101024	Feb. 17, 2025	1 Year
BiLog Antenna	TESEQ	CBL 6112D	29068	Oct. 10, 2024	2 Year
Low Noise Amplifier	SONOMA	310N	300913	Feb. 17, 2025	1 Year
RF Selector 4CH	TOYO	NS4904N	Selector1	N/A	N/A
RF Selector 4CH	TOYO	NS4904N	Selector2	N/A	N/A
Mast Control	INNCO	CONTROLLE R CO2000	ZOAA97AZ10 0013D	N/A	N/A
BiLog Antenna	TESEQ	CBL 6112D	29069	Oct. 10, 2024	2 Year
EMI Test Receiver	Rohde & Schwarz	ESCI	101030	Feb. 17, 2025	1 Year
Low Noise Amplifier	SONOMA	310N	334532	Feb. 17, 2025	1 Year
Test Software	TOYO	EP5/RE	Ver 5.7.10	N/A	N/A

5.3 Reference Standard

EN 55032:2015,
 EN 55032:2015/A11:2020,
 EN 55032:2015/A1:2020,
 BS EN 55032:2015+A1:2020,
 BS EN 55032:2015,
 BS EN 55032:2015+A11:2020,
 CISPR 32:2015,
 CISPR 32:2015/AMD1:2019,
 AS/NZS CISPR 32:2015,
 AS/NZS CISPR 32:2015 AMD 1:2020

5.4 Test Arrangement

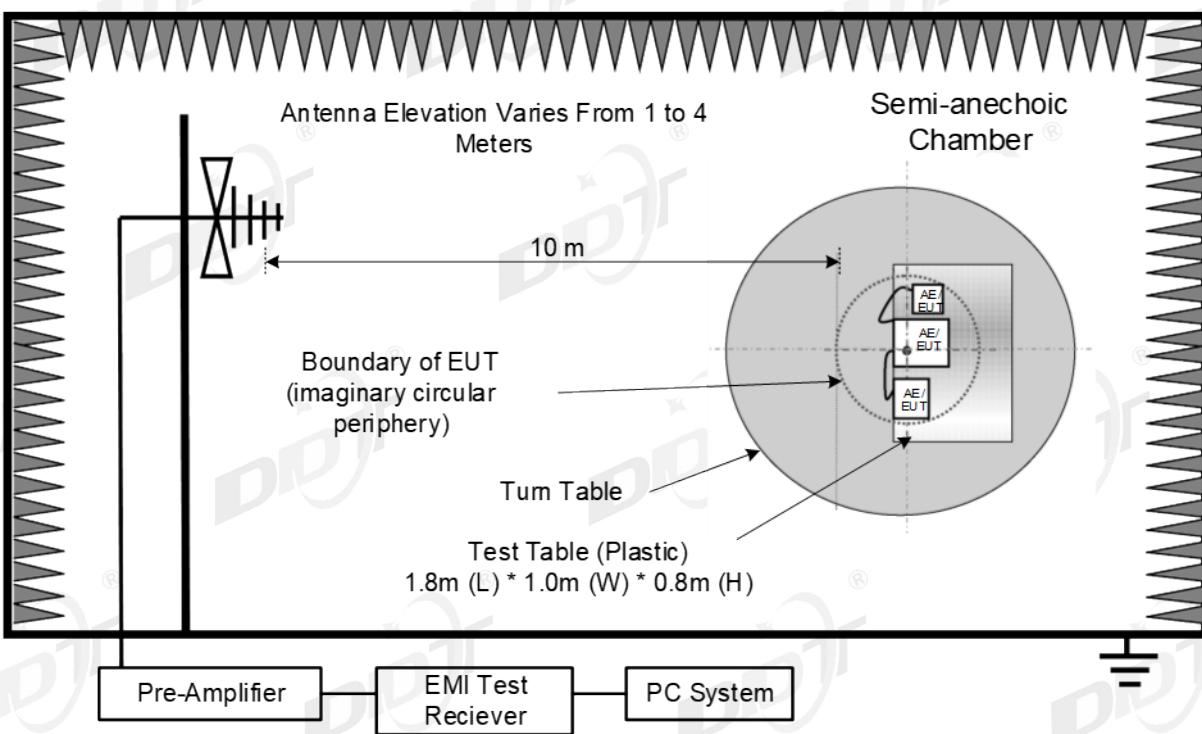

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.

Test antenna was located 10m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded.

Spectrum frequency from 30MHz to 1GHz was investigated.

For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded.

For emissions from 30MHz to 1GHz, Quasi-Peak values were measured with EMI Receiver and the bandwidth of Receiver is 120 kHz.

Final measurements consisted of 3 steps. First step, frequency fine tuning to find exact emission frequency. Second step, rechecking to search for maximum height and azimuth for interference from EUT. In final step, there are conducted measuring with quasi-peak detector for points which are detected from 1st step & 2nd step. Results checked manually and points close to the limit line were re-measured.

Pre-scan measurements were performed in all operating mode or condition. But final measurements were performed in worst cases based on pre-scan measurements.

The EUT with following test modes were pre-tested:

No.	Test Voltage	Operation Mode	Cable Length	Resolution	Rotation	Stand Position	Audio
1.	230V 50Hz	Mode1 HDMI 1	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
2.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
3.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker

4.	Mode2 HDMI 2	1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
5.		1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
6.		1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
7.		1.8m	DVD	Landscape	HAS Stand-up	External Speaker
8.		1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
9.		1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
10.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
11.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
12.		1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
13.		1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
14.		1.8m	DVD	Landscape	HAS Stand-up	External Speaker
15.	Mode3 DP	1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
16.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
17.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
18.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
19.		1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
20.	Mode4 TYPE-C	1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
21.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
22.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
23.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
24.		1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
25.	The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker	
26.	The worst case above with 1.5m power cord		Landscape	HAS Stand-up	External Speaker	
27.	The worst case above with 1.2m power cord		Landscape	HAS Stand-up	External Speaker	
28.	The worst case above with 1.8m power cord		Portrait (-90 degree)	HAS Stand-up	External Speaker	
29.	The worst case above with 1.8m power cord		Portrait (-270 degree)	HAS Stand-up	External Speaker	
30.	The worst case above with 1.8m power cord		Landscape	HAS Stand-down	External Speaker	
31.	The worst case above with 1.8m power cord with scrolling "H" pattern		Landscape	HAS Stand-up	External Speaker	
32.	The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	Without Headphone	
33.	The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	With Headphone	
34.	The worst case above with 1.8m power cord and Type C Max load		Landscape	HAS Stand-up	External Speaker	
35.	110V 60Hz	The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker

5.5 Test Specification and Limit

Class B

Frequency	Field Strengths Limits at 10m measuring distance dB(μ V/m)
30MHz to 230MHz	30
230MHz to 1000MHz	37

Note: (1) The smaller limit shall apply at the cross point between two frequency bands.

(2) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Note for test result

Note1): According pre-test, the worst test modes decided as below and reported. Only data of worst mode was reported in test result.

Note2) (P): Abbreviation of Antenna Polarity

Note3) Receiving antenna polarization: Horizontal and/or Vertical. Antenna Height: 1 m to 4 m


Note4) Level QP (Quasi-Peak) = Reading QP + Factor

Note5) Factor = Antenna Factor + Cable Loss - Amp. Gain

Note6) Margin = Limit – Level QP

5.6 Test Result

Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 1 HDMI1	Pre-scan measurement	Pass
Y25070701-01	Mode 2 HDMI2	Pre-scan measurement	Pass
Y25070701-01	Mode 3 DP	Pre-scan measurement	Pass
Y25070701-01	Mode 4 TYPE-C	Final measurement , minimum margin 4.1 dB	Pass

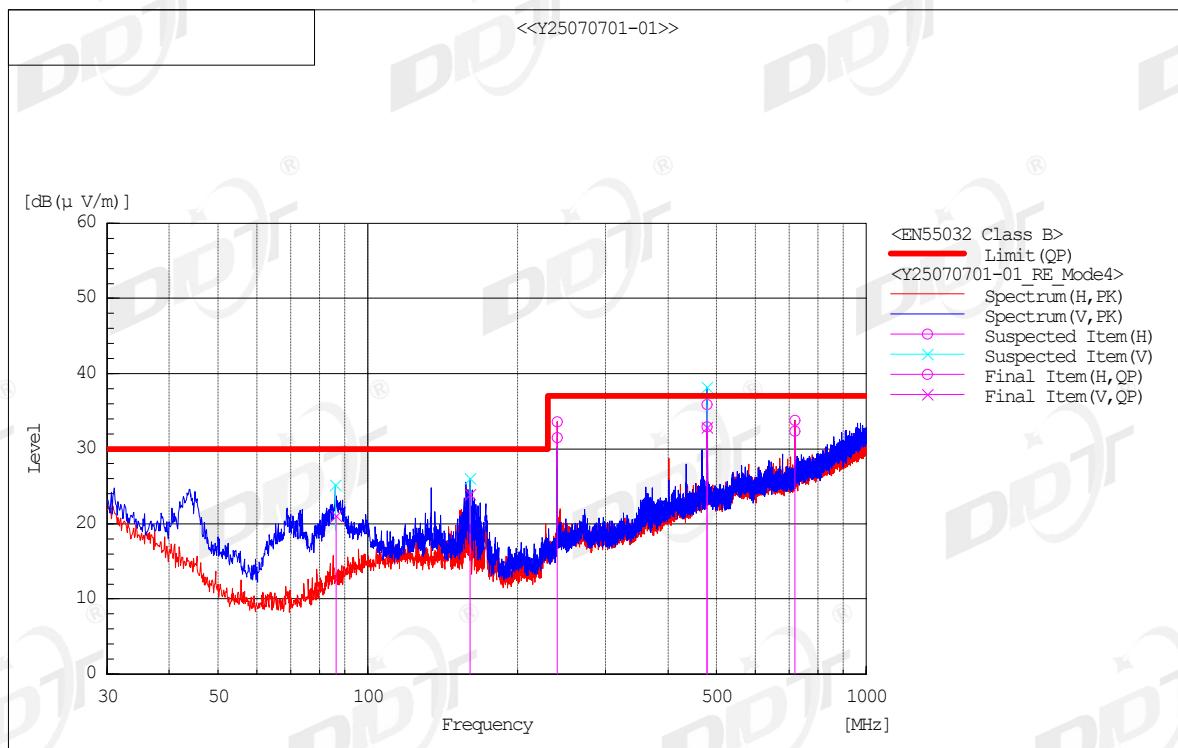

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB (μ V)]	c.f. [dB (1/m)]	Result QP [dB (μ V/m)]	Limit QP [dB (μ V/m)]	Margin QP [dB]	Height [cm]	Angle [°]	System
1	239.991	H	41.7	-10.2	31.5	37.0	5.5	317.0	284.8	1
2	479.953	H	35.2	-2.3	32.9	37.0	4.1	213.0	189.0	1
3	720.016	H	31.2	1.1	32.3	37.0	4.7	395.0	134.1	1
4	86.415	V	35.8	-14.7	21.1	30.0	8.9	225.0	346.3	2
5	160.459	V	35.8	-11.9	23.9	30.0	6.1	104.0	342.1	2
6	479.988	V	34.6	-1.8	32.8	37.0	4.2	316.0	5.5	2

6 Radiated Emissions (Above 1GHz)

6.1 General Information

Test date	Jul. 13, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	24.5°C	Relative humidity	55.4%
	Atmospheric pressure	100.5kPa		
Test place	10m Chamber			


6.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU26	100244	Feb. 17, 2025	1 Year
Broadband Horn Antenna	TESEQ	BHA 9118	31754	Oct. 11, 2023	2 Year
Amplifier	COM-MW	DPA8 1000 18000-1012	09211739	Feb. 17, 2025	1 Year
Test Software	TOYO	EP5/RE	Ver 5.7.10	N/A	N/A

6.3 Reference Standard

EN 55032:2015,
EN 55032:2015/A11:2020,
EN 55032:2015/A1:2020,
BS EN 55032:2015+A1:2020,
BS EN 55032:2015,
BS EN 55032:2015+A11:2020,
CISPR 32:2015,
CISPR 32:2015/AMD1:2019,
AS/NZS CISPR 32:2015,
AS/NZS CISPR 32:2015 AMD 1:2020

6.4 Test Arrangement

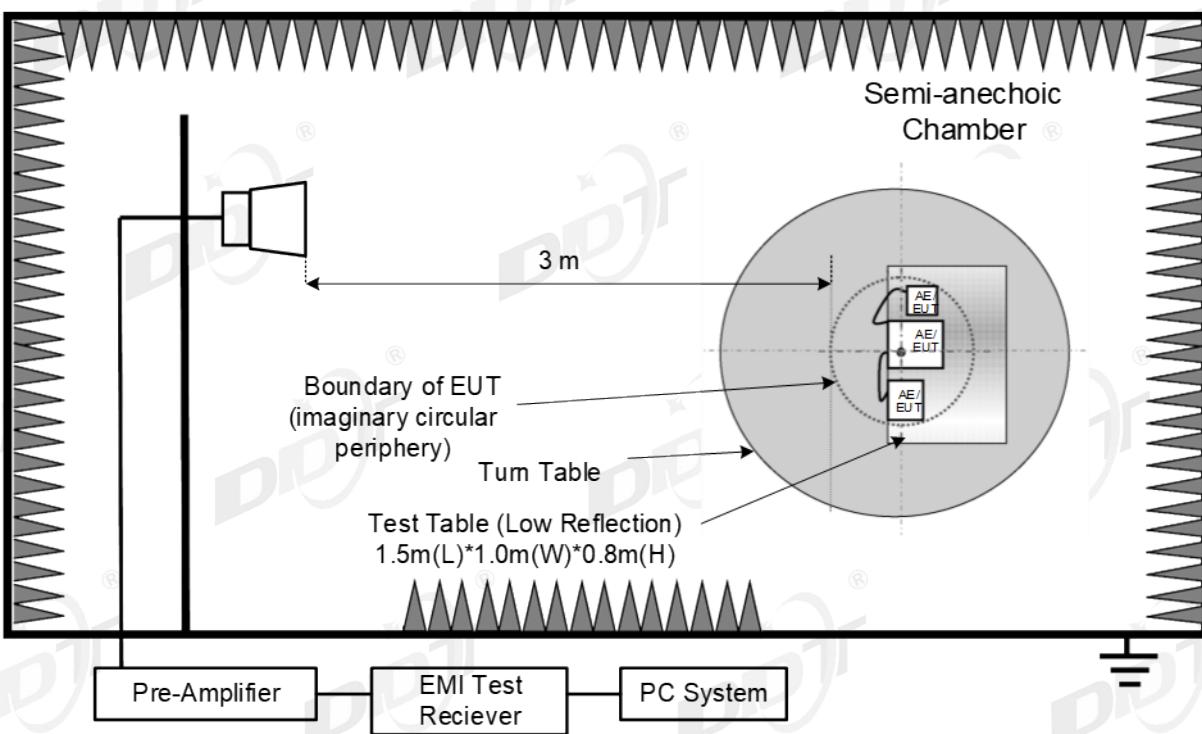

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz.

Measurements within 20 dB of the limit were then maximized by adjusting turntable position.

Final measurements were made using an C/Average detector.

Results checked manually and points close to the limit line were re-measured.

Pre-scan measurements were performed in all operating mode or resolution. But final measurements were performed in worst cases based on pre-scan measurements.

The EUT with following test modes were pre-tested:

No.	Test Voltage	Operation Mode	Cable Length	Resolution	Rotation	Stand Position	Audio
1.	230V 50Hz	Mode1 HDMI 1	1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
2.			1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
3.			1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
4.			1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker

5.	Mode2 HDMI 2	1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
6.		1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
7.		1.8m	DVD	Landscape	HAS Stand-up	External Speaker
8.		1.8m	3840*2160@60Hz	Landscape	HAS Stand-up	External Speaker
9.		1.8m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
10.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
11.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
12.		1.5m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
13.		1.2m	3440*1440@100Hz	Landscape	HAS Stand-up	External Speaker
14.		1.8m	DVD	Landscape	HAS Stand-up	External Speaker
15.		1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
16.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
17.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
18.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
19.	Mode3 DP	1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
20.		1.8m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
21.		1.8m	1920*1080@60Hz	Landscape	HAS Stand-up	External Speaker
22.		1.8m	800*600@60Hz	Landscape	HAS Stand-up	External Speaker
23.		1.5m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
24.		1.2m	3440*1440@120Hz	Landscape	HAS Stand-up	External Speaker
25.	Mode4 TYPE-C	The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker
26.		The worst case above with 1.5m power cord		Landscape	HAS Stand-up	External Speaker
27.		The worst case above with 1.2m power cord		Landscape	HAS Stand-up	External Speaker
28.		The worst case above with 1.8m power cord		Portrait (-90 degree)	HAS Stand-up	External Speaker
29.		The worst case above with 1.8m power cord		Portrait (-270 degree)	HAS Stand-up	External Speaker
30.		The worst case above with 1.8m power cord		Landscape	HAS Stand-down	External Speaker
31.		The worst case above with 1.8m power cord with scrolling "H" pattern		Landscape	HAS Stand-up	External Speaker
32.		The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	Without Headphone
33.		The worst case 1920*1080@60Hz with 1.8m power cord		Landscape	HAS Stand-up	With Headphone
34.		The worst case above with 1.8m power cord and Type C Max load		Landscape	HAS Stand-up	External Speaker
35.	110V 60Hz	The worst case above with 1.8m power cord		Landscape	HAS Stand-up	External Speaker

6.5 Test Specification and Limit

Class B

Frequency range Limits (GHz)	Limits of Class B, dB(μ V/m)	
	Peak	C/Average
1 ~ 3	70	50
3 ~ 6	74	54

Note: The lower limit shall apply at the transition frequency

Note for test result

Note1): According pre-test, the worst test modes decided as below and reported. Only data of worst mode was reported in test result.

Note2) (P) : Abbreviation of Antenna Polarity

Note3) Reading PK / C/AV: Received raw Peak / C/Average signal


Note4) Level PK / C/AV = Reading PK / C/AV + Factor, Real signal Peak / C/Average level

Note5) Factor = Antenna factor + Cable loss – Amplifier gain

Note6) Margin PK / C/AV = Limit – Level PK / C/AV

6.6 Test Result

Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 1 HDMI1	Pre-scan measurement	Pass
Y25070701-01	Mode 2 HDMI2	Pre-scan measurement	Pass
Y25070701-01	Mode 3 DP	Pre-scan measurement	Pass
Y25070701-01	Mode 4 TYPE-C	Final measurement , minimum margin 10.6 dB	Pass

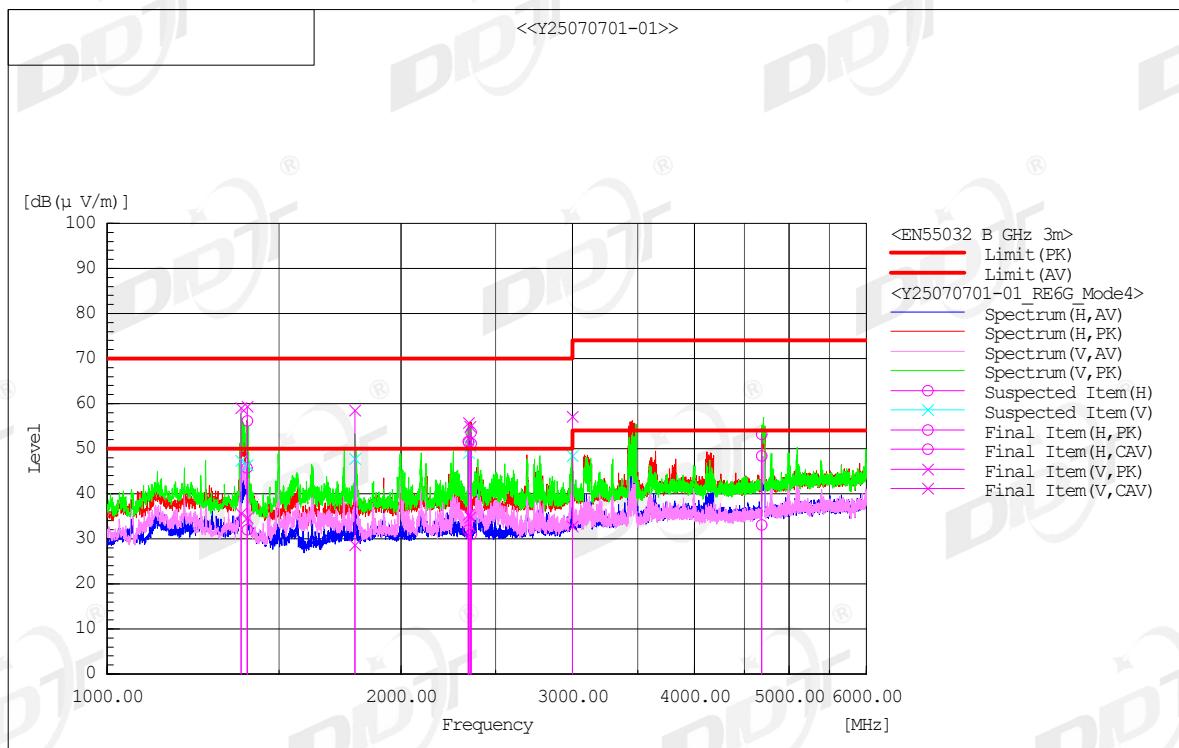

Final Result

No.	Frequency [MHz]	(P)	Reading	Reading	c.f.	Result	Result	Limit	Limit	Margin	Margin	Height	Angle
			PK	CAV	[dB (1/m)]	[dB (μV/m)]	[dB (μV/m)]	PK	AV	PK	CAV	[cm]	[°]
1	1392.050	H	82.3	58.1	-26.1	56.2	32.0	70.0	50.0	13.8	18.0	123.0	219.6
2	2345.254	H	75.3	55.6	-23.7	51.6	31.9	70.0	50.0	18.4	18.1	187.0	147.3
3	2360.104	H	74.8	54.6	-23.6	51.2	31.0	70.0	50.0	18.8	19.0	178.0	149.0
4	4688.173	H	70.7	50.6	-17.5	53.2	33.1	74.0	54.0	20.8	20.9	133.0	209.9
5	1372.103	V	84.9	61.5	-25.9	59.0	35.6	70.0	50.0	11.0	14.4	111.0	216.1
6	1392.574	V	85.5	60.8	-26.1	59.4	34.7	70.0	50.0	10.6	15.3	106.0	212.9
7	1795.566	V	84.5	54.6	-26.0	58.5	28.6	70.0	50.0	11.5	21.4	114.0	5.8
8	2348.779	V	79.4	59.1	-23.7	55.7	35.4	70.0	50.0	14.3	14.6	125.0	172.4
9	2356.765	V	78.6	58.5	-23.7	54.9	34.8	70.0	50.0	15.1	15.2	132.0	177.8
10	2999.848	V	78.8	54.5	-21.7	57.1	32.8	70.0	50.0	12.9	17.2	119.0	357.7

7 Harmonic Current Emissions

7.1 General Information

Test date	Jul. 14, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	28.5°C	Relative humidity	43.7%
	Atmospheric pressure	100.1kPa		
Test place	Shield Room 2#			


7.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
High Performance Linear AC power sources	Pacific Power Source	360-AMX	1234	Feb. 17, 2025	1 Year
High Performance Linear AC power sources	Pacific Power Source	360-AMX	1235	Feb. 17, 2025	1 Year
Harmonics and Flicker Analyzer	Newton4th Ltd	PPA5511	162-04584	Nov. 16, 2024	1 Year
IEC Reference Impedance Network	Voltech	IEC61000-3	IG164/2021	Nov. 16, 2024	1 Year
Test Software	N4L	IEC Soft	Ver 2.4e	N/A	N/A

7.3 Reference Standard

EN 61000-3-2:2014,
 EN IEC 61000-3-2:2019/A1:2021,
 EN IEC 61000-3-2:2019/A2:2024,
 EN IEC 61000-3-2:2019,
 BS EN IEC 61000-3-2:2019+A1:2021,
 BS EN IEC 61000-3-2:2019+A2:2024,

7.4 Test Arrangement

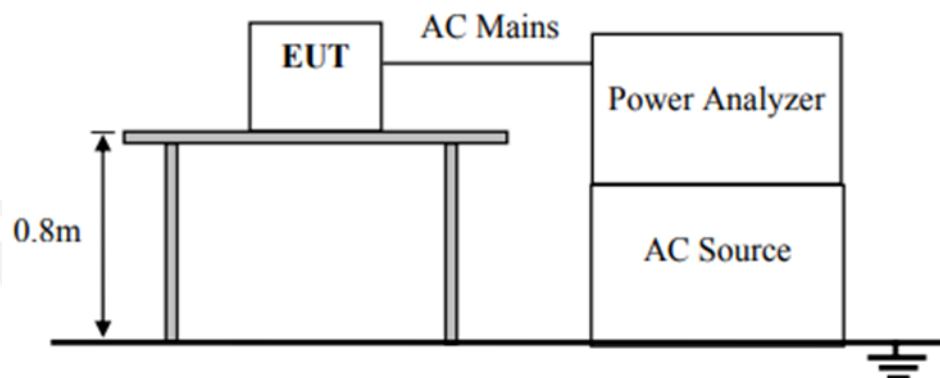

7.5 Test Specification and Limit

Limits for Class D equipment

Harmonic order	Maximum permissible harmonic current per watt	Maximum permissible harmonic current
n	mA/W	A
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13 ≤ n ≤ 39 (odd harmonics only)	3.85/n	See Table 1

7.6 Test Result

Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 4 TYPE-C	N/A	Pass

Page		
Test Settings		
Class	Class D	
Mode	Measure	
Equipment Under Test		
Brand	N/A	
Model	Y25070701-01	
Serial	N/A	
Impedance Network ID	N/A	
Test Conditions		
	User Entered	Measured
Rated Voltage	230.000 V	231.389 V
Rated Current	N/A	507.322 mA
Rated Frequency	50.000 Hz	50.000 Hz
Rated Power	N/A	116.531 W
Additional Test Information		
Measured Power Factor	0.9927	
Max Current THD	4.20%	
Max THC	0.0188A	
Max Power	116.560 W	
Max F. Current	506.725 mA	
Average F. Current	506.486 mA	
Minimum Current	100mA	
Test Duration	2.5 minutes	
Additional Test Details		
Operator	N/A	
Lab Name	N/A	
Location	N/A	
Notes		
Signature		
Results	PASS	

8 Voltage Changes, Voltage Fluctuations and Flicker

8.1 General Information

Test date	Jul. 14, 2025	Test engineer	Freya Wei	
Climate condition	Ambient temperature	28.5°C	Relative humidity	43.7%
	Atmospheric pressure	100.1kPa		
Test place	Shield Room 2#			


8.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
High Performance Linear AC power sources	Pacific Power Source	360-AMX	1234	Feb. 17, 2025	1 Year
High Performance Linear AC power sources	Pacific Power Source	360-AMX	1235	Feb. 17, 2025	1 Year
Harmonics and Flicker Analyzer	Newton4th Ltd	PPA5511	162-04584	Nov. 16, 2024	1 Year
IEC Reference Impedance Network	Voltech	IEC61000-3	IG164/2021	Nov. 16, 2024	1 Year
Test Software	N4L	IEC Soft	Ver 2.4e	N/A	N/A

8.3 Reference Standard

EN 61000-3-3:2013,
 EN 61000-3-3:2013/A1:2019,
 EN 61000-3-3:2013/A2:2021,
 EN 61000-3-3:2013/A2:2021/AC:2022-01,
 BS EN 61000-3-3:2013,
 BS EN 61000-3-3:2013+A1:2019,
 BS EN 61000-3-3:2013+A2:2021,

8.4 Test Arrangement

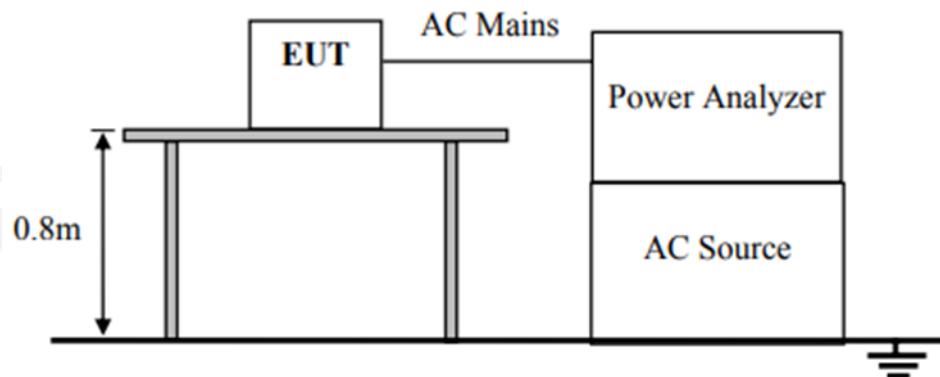

8.5 Test Specification and Limit

short-term flicker indicator, Pst	the relative steady-state voltage change, dc	the value of d(t) during a voltage change, d(t) > 3.3 %	the maximum relative voltage change, dmax
1.0	3.3 %	500 ms	4 %

8.6 Test Result

Sample No.	Operation Mode	Remarks	Result
Y25070701-01	Mode 4 TYPE-C	N/A	Pass

Page 1/4		
Test Settings		
Class	Voltage	
Mode	Normal - 4%	
Minimum Current	300mA	
PST	10.00 minutes	
PLT	1 PSTs	
Equipment Under Test		
Brand	N/A	
Model	Y25070701-01	
Serial	N/A	
Impedance Network ID	N/A	
Test Conditions		
	User Entered	Measured
Rated Voltage	230.000 V	231.354 V
Rated Current	N/A	N/A
Rated Frequency	50.000 Hz	50.000 Hz
Rated Power	N/A	N/A
D max	0.2579% (Limit: 4%)	
T max	0.0000 s (Limit: 0.5 s)	
DC max	0.0221% (Limit: 3.3%)	
Inrush Test	0.0865% (Limit: 4%)	
Inrush Results	Phase1: Pass	
Additional Test Details		
Operator	N/A	
Lab Name	N/A	
Location	N/A	
Notes		
Signature		
Results	Phase1: PASS	

Ph:1 Page 2/4			
Equipment Under Test			
Brand	N/A		
Model	Y25070701-01		
Serial	N/A		
Inrush Current Results			
Test Number	Dmax (%)	Running Average (%)	Status
1	0.045228	0	Lowest
2	0.11004	0.11004	OK
3	0.13705	0.123545	OK
4	0.084722	0.110604	OK
5	0.15721	0.110604	Highest
6	0.053167	0.096245	OK
7	0.078827	0.092761	OK
8	0.091445	0.092542	OK
9	0.07472	0.089996	OK
10	0.099611	0.091198	OK
11	0.049716	0.086589	OK
12	0.10051	0.087981	OK
13	0.13924	0.092641	OK
14	0.11013	0.094098	OK
15	0.052404	0.090891	OK
16	0.047821	0.087815	OK
17	0.087547	0.087797	OK
18	0.080001	0.087309	OK
19	0.11011	0.088651	OK
20	0.068682	0.087541	OK
21	0.12875	0.08971	OK
22	0.059998	0.088225	OK
23	0.070638	0.087387	OK
24	0.067687	0.086492	OK

Key
Above Limit
Lowest Dmax
Highest Dmax

9 Electrostatic Discharge Immunity

9.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			


9.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
ESD Simulator	TESEQ	NSG 437	407	May. 12, 2025	1 Year
Discharge Network	TESEQ	INA 4380	0011	May. 12, 2025	1 Year

9.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-2:2025

9.4 Test Arrangement

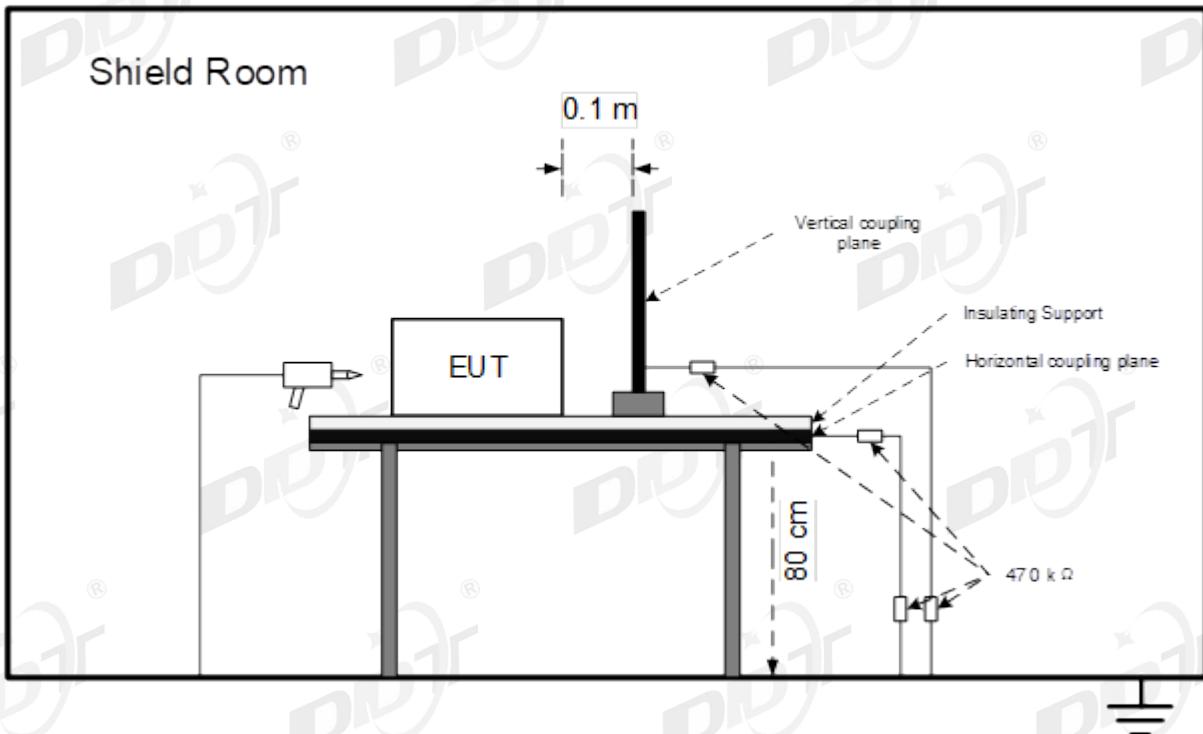

Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single

discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed.

Contact Discharge:

All the procedure was same as air discharge. Except that the generator was re-triggered for a new single discharge. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane:

At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

9.5 Test Specification and Limit

Test Level		Performance Criteria	
Air Discharge	$\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$		
Contact Discharge	$\pm 4\text{kV}$	B	

9.6 Test Result


Sample No. Y25070701-01						
Operation Mode	Discharge Method	Test Level	Test Point	Required	Observation	Result
Mode 4 TYPE-C	Contact Discharge	$\pm 4\text{kV}$	4,12,13	B	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Air Discharge	$\pm 2\text{kV}$	1,2,3,5,6,7,8,9,10,11	B	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Air Discharge	$\pm 4\text{kV}$	1,2,3,5,6,7,8,9,10,11	B	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Air Discharge	$\pm 8\text{kV}$	1,2,3,5,6,7,8,9,10,11	B	B ⁽²⁾	Pass
Remark						
(1)	Operation as intend, no loss of function during test and after test.					
(2)	During the test, the sample screen flickered and went out. After the test, the sample automatically returns to the normal working state without the need for manual operation.					

Test Point


No.	Description	No.	Description	No.	Description
1	Panel	2	Button	3	Camera
4	Shield Cover	5	DP Port	6	HDMI Port
7	USB-C Port	8	USB-A Port	9	LAN Port
10	Audio Out Port	11	Gap	12	Coupling Planes
13	Screw	/	/	/	/

Discharge Point Photo

Contact

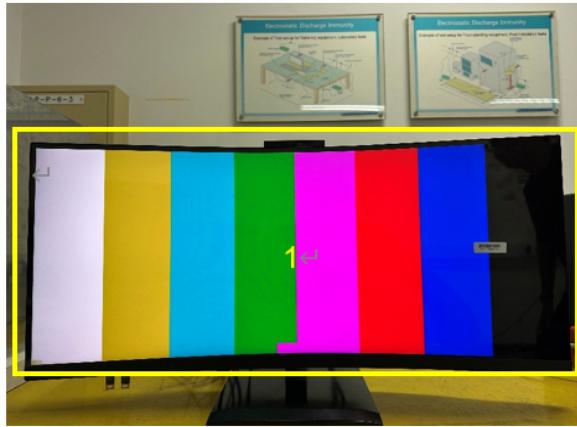

Air

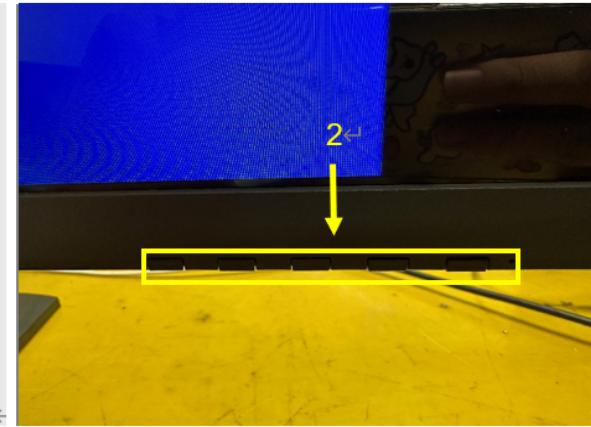


3



4 5 6 6 7 8 7 9 10


HDMI1 HDMI2 U C1 C2 V C2 A

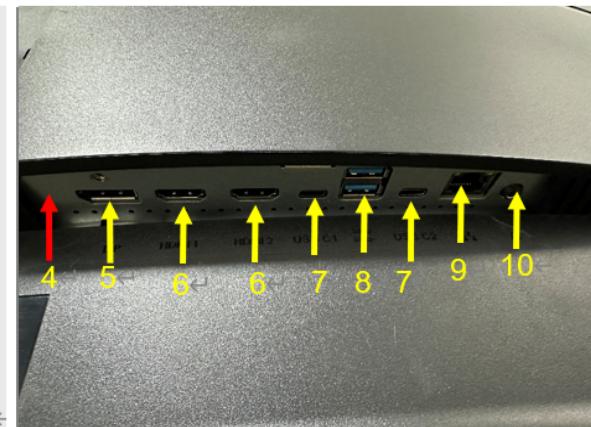


11



12

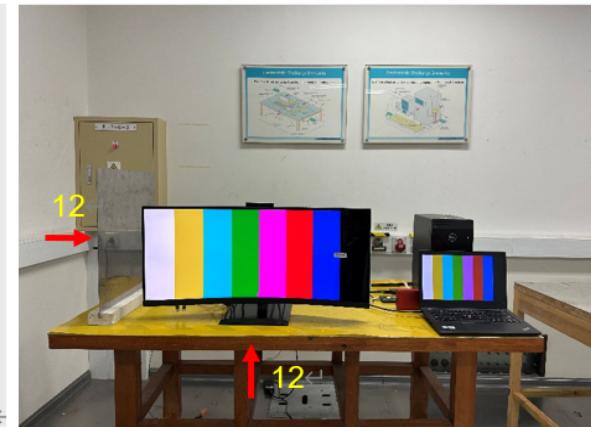

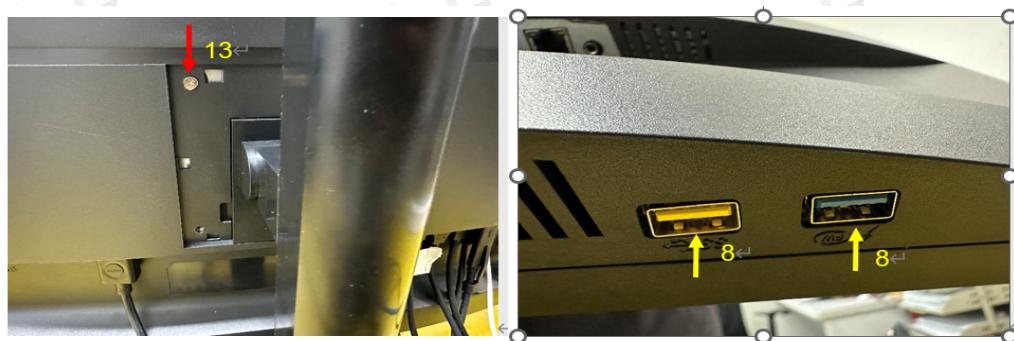

10 Radiated, Radio-frequency, Electromagnetic Field Immunity

10.1 General Information

Test date	Jul. 14, 2025	Test engineer	Wendy Sun	
Climate condition	Ambient temperature	27.1°C	Relative humidity	49.7%
	Atmospheric pressure	100.2kPa		
Test place	3m Chamber			


10.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Power Meter	Rohde & Schwarz	NRP	102424	Feb. 17, 2025	1 Year
Average Power Sensor	Rohde & Schwarz	NRP-Z91	100937	Feb. 17, 2025	1 Year
Average Power Sensor	Rohde & Schwarz	NRP-Z91	100938	Feb. 17, 2025	1 Year
Audio Analyzer	Rohde & Schwarz	UPV	101525	Feb. 17, 2025	1 Year
Stacked Logarithmic-Periodic Broadband Antenna	SCHWARZBECK	STLP 9149	9149-059	N/A	N/A
Microwave Signal Generator	Rohde & Schwarz	SMB100A	104909	Feb. 17, 2025	1 Year
Special - Stacked Log Periodic Antenna	SCHWARZBECK	STLP 9128 E special	9128ES-171	N/A	N/A
RF Switch for Radiated	SKET	RS_DC06G-AMC-3C	SK2020081901	N/A	N/A
Power Amplifier	SKET	HAP_01G032 G-250W	202104178	Aug. 02, 2024	1 Year
Power Amplifier	SKET	HAP_03G06G-75W	SK202106221	Aug. 02, 2024	1 Year
Power Amplifier(Combiner)	SKET	HAP_80M200 M/200M1G-2000/1000W	202102154	Aug. 02, 2024	1 Year
Test Software	SKET	EMC-S	V2.1.4.15	N/A	N/A

10.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-3:2020

10.4 Test Arrangement

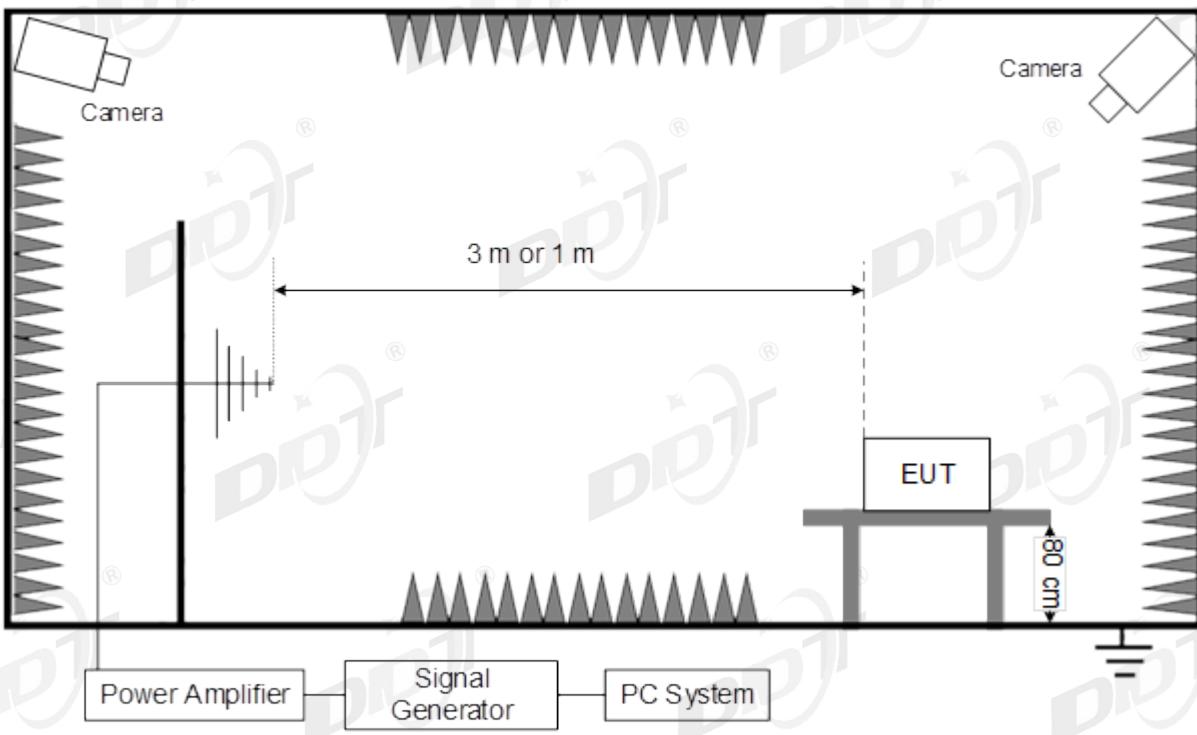

The EUT is initially placed with one face coincident with the calibration plane. The EUT face being illuminated shall be contained within the UFA unless partial illumination is being applied.

The frequency ranges to be considered are swept with the signal modulated, pausing to adjust the RF signal level or to switch oscillators and antennas as necessary.

Where the frequency range is swept incrementally, the step size shall not exceed 1 % of the preceding frequency value.

The dwell time of the amplitude modulated carrier at each frequency shall not be less than the time necessary for the EUT to be exercised and to respond, but shall in no case be less than 0,5 s. The sensitive frequencies (e.g., clock frequencies) shall be analyzed separately according to the requirements in product standards.

The test shall normally be performed with the generating antenna facing each side of the EUT.

When equipment can be used in different orientations (i.e. vertical or horizontal) all sides shall be exposed to the field during the test. When technically justified, some EUTs can be tested by exposing fewer faces to the generating antenna. In other cases, as determined for example by the type and size of EUT or the frequencies of test, more than four azimuths may need to be exposed.

The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.

10.5 Test Specification and Limit

Swept frequency test		Performance Criteria
Frequency (MHz)	80 to 1000	A
Field Strength	3V/m rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of 1kHz (note 1)	
Step Size	1% increments	
Dwell time	<5 Sec.	

Spot frequency test		Performance Criteria
Frequency (MHz)	1800, 2600, 3500, 5000	A
Field Strength	3V/m rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of 1kHz (note 1)	
Dwell time	<5 Sec.	

Note 1: The 1kHz modulation may be replaced by a different audio modulation frequency more appropriate for a given EUT if, for example, 1kHz is not within the operating audio range of the EUT.

For audio output function (if applied):

Performance criterion A

During the test the audio output function shall be maintained. The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.

10.6 Test Result

Sample No. Y25070701-01						
Frequency Range & Field Strength						
80MHz ~ 1000MHz		3V/m				
1800MHz, 2600MHz, 3500MHz, 5000MHz		3V/m				
Steps: 1%		Dwell time: 1s			Modulation: 1KHz 80% AM	
Operation Mode	EUT Position	Antenna: Horizontal			Antenna: Vertical	Result
		Required	Observation	Required	Observation	
Mode 4 TYPE-C	Front side	A	A ⁽¹⁾	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Back side	A	A ⁽¹⁾	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Left side	A	A ⁽¹⁾	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	Right side	A	A ⁽¹⁾	A	A ⁽¹⁾	Pass
Remark						
(1)	Operation as intend, no loss of function during test and after test.					

Audio output function result: <input type="checkbox"/> this device without audio output function.			
Method	Port	Acoustic interference ratio L1-L0 (dB) Required: ≤-20dB	Result
✓acoustic measurement	Speaker	-40.78	Pass
✓electrical measurement	Audio out	-42.70	Pass

11 Electrical Fast Transient/Burst Immunity

11.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			


11.2 Test Equipment


Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Multifunctional Generator	EMTEST	UCS 500N7.1	P1303110687	Feb. 17, 2025	1 Year
3-Phase Coupling Decoupling Network	EMTEST	CNI 503B7	V1250114298	Feb. 17, 2025	1 Year
Capacitive Coupling Clamp	EMTEST	HFK	P1306111514	Feb. 17, 2025	1 Year
Test Software	EM TEST	iec.control	Version 5.2.3	N/A	N/A

11.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-4:2012

11.4 Test Arrangement

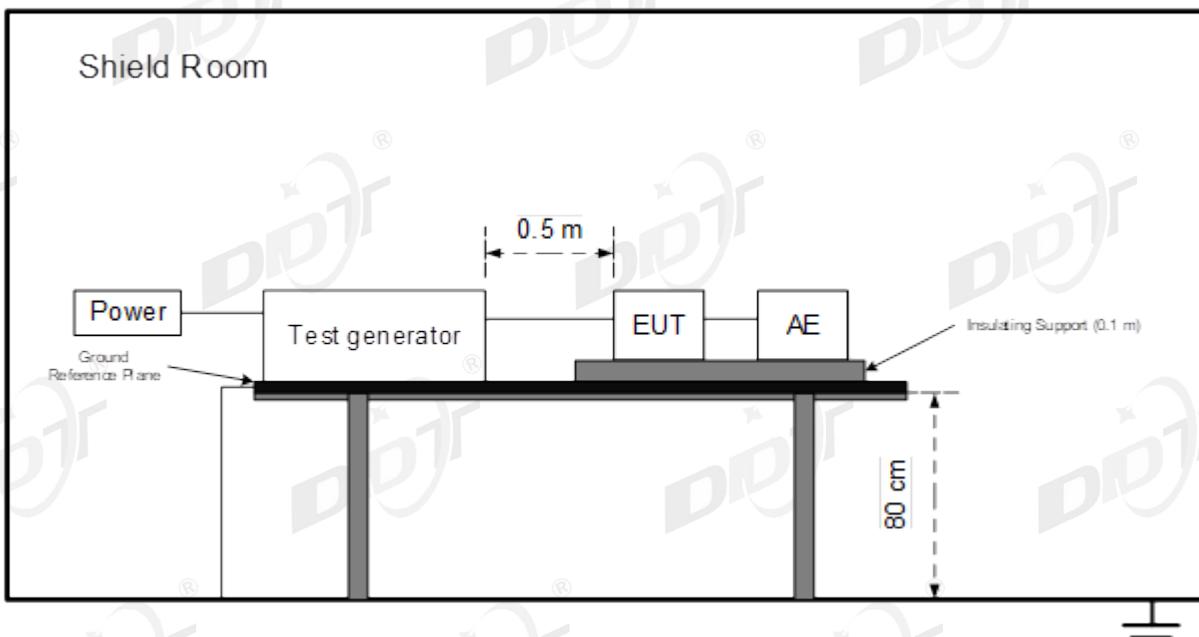

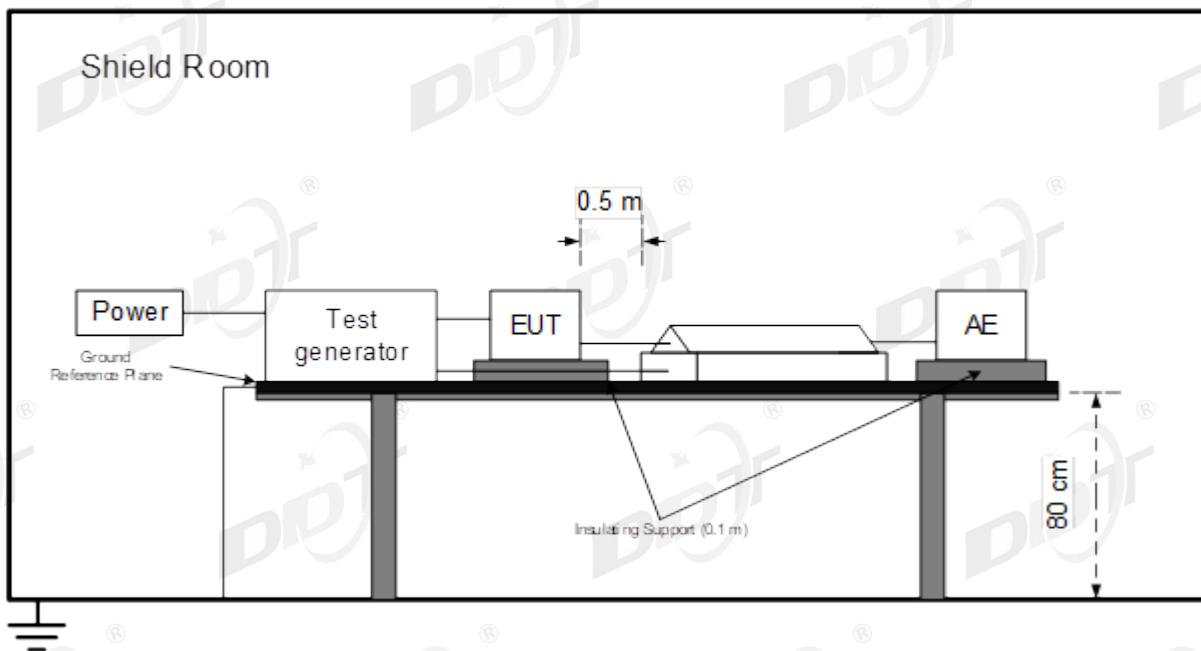

The EUT and its simulators were placed on the ground reference plane and were insulated from it by an insulating support $0.1\text{ m} \pm 0.01\text{ m}$ thick.

The minimum distance between the EUT and all other conductive structures (e.g. the walls of a shielded room), except the ground reference plane shall be more than 0,5 m.

All cables to the EUT shall be placed on the insulation support 0,1 m above the ground reference plane. Cables not subject to electrical fast transients shall be routed as far as possible from the cable under test to minimize the coupling between the cables.

11.5 Test Specification and Limit

Test Level		Performance Criteria	
Test voltage	$\pm 1\text{kV}$ For AC mains Port	B	$\pm 0.5\text{kV}$ for DC input or signal Port
Repetition Frequency	5kHz		5kHz
Burst Duration	15ms		15ms
Burst Period	300ms		300ms
Inject Time(s)	120s		120s
Inject Method	Direct for AC mains port		Direct for signal port Direct for dc input port
Inject Line	AC Mains or adapter		DC input of adapter or Capacitive coupling clamp

Note: This test shall be additionally performed on analogue/digital data ports, and DC network power ports, of radio equipment and associated ancillary equipment, if the cables may be longer than 3 m.

11.6 Test Result

Sample No. Y25070701-01						
Injected Port	AC Mains Power		Coupling		Direct	
Burst Period:	300ms		Test Time:		120s	
Repetition Frequency	5KHz		Burst Durations		15ms	
Operation Mode	Line	Test Voltage	Required	Observation		Result
				Positive	Negative	
Mode 4 TYPE-C L		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C N		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C L-N		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C L-PE		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C N-PE		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C PE		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Mode 4 TYPE-C L-N-PE		±1kV	B	B ⁽¹⁾	B ⁽¹⁾	Pass
Remark						
(1)	During the test, the sample screen started to flicker. After the test, the sample automatically returns to its normal working condition without any human intervention.					

Sample No. Y25070701-01						
Injected Port	LAN Port		Coupling		Capacitive Clamp	
Burst Period:	300ms		Test Time:		120s	
Repetition Frequency	5KHz		Burst Durations		15ms	
Operation Mode	Line	Test Voltage	Required	Observation		Result
				Positive	Negative	
Mode 4 TYPE-C LAN Port		±0.5kV	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Remark						
(1)	Operation as intend, no loss of function during test and after test.					

12 Surge Immunity

12.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			


12.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Multifunctional Generator	EMTEST	UCS 500N7.1	P1303110687	Feb. 17, 2025	1 Year
3-Phase Coupling Decoupling Network	EMTEST	CNI 503B7	V1250114298	Feb. 17, 2025	1 Year
Coupling Network 4 Pairs for symmetrical high speed communication lines up to 1000 MBit/s	EMTEST	CN 508N1	V1250114302	Feb. 17, 2025	1 Year
Coupling / Decoupling Network for symmetrical high speed communication lines up to 1000 MBit/s	EMTEST	CNI 508N1	V1250114301	Feb. 17, 2025	1 Year
Surge Protection Network for symmetrical high speed communication lines up to 1000 MBit/s	EMTEST	SPN 508N1	V1250114303	Feb. 17, 2025	1 Year
Test Software	EM TEST	iec.control	Version 5.2.3	N/A	N/A

12.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-5:2014+AMD1:2017 CSV

12.4 Test Arrangement

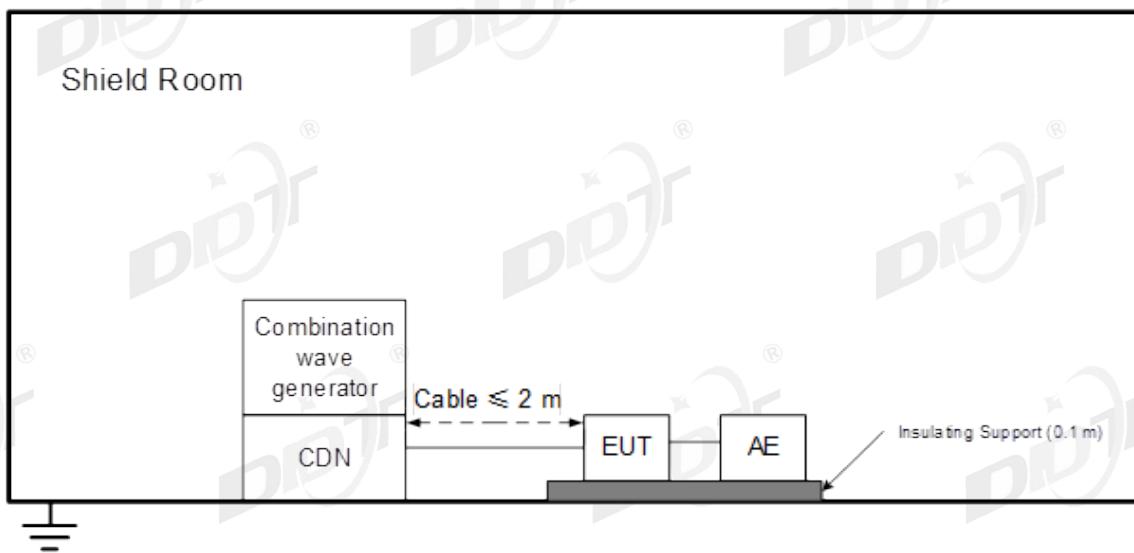

EUT should be configured in representative operating conditions.

At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.

Different phase angles are done individually, if applied.

Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

12.5 Test Specification and Limit

Test level for AC mains ports		Performance Criterion
Line to Line	1kV 1.2/50(8/20) μ s	B
Line to Ground	2kV 1.2/50(8/20) μ s	B
Analogue/digital data port, Port type: unshielded symmetrical		Performance Criterion
Line to Ground	1 kV and 4kV 10/700(5/320) μ s (used with the primary protection)	C
Line to Ground	1 kV 10/700(5/320) μ s (used without the primary protection)	C
Note: Applicable only to ports which, according to the manufacturer's specification, the cable lengths greater than 3m.		
Analogue/digital data port, Port type: coaxial or shielded		Performance Criterion
Shield to ground	0.5 kV 1.2/50(8/20) μ s	B
Note: Applicable only to ports which, according to the manufacturer's specification, the cable lengths greater than 3m.		
DC network power port		Performance Criterion
Line to reference ground	0.5 kV 1.2/50(8/20) μ s	B

Note: Applicable only to ports which, according to the manufacturer's specification,

(1) The cable lengths greater than 3m;

(2) May connect directly to outdoor cables.

(3) Where the surge coupling network for the 10/700 (5/320) μ s waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) μ s waveform and appropriate coupling network.

(4) The number of pulses applied shall be as follows:

Five positive pulses line-to-neutral at 90° phase

Five negative pulses line-to-neutral at 270° phase

The following additional pulses are required only if the EUT has an earth connection or if the EUT is earthed via any AE.

Five positive pulses line-to-earth at 90° phase

Five negative pulses line-to-earth at 270° phase

Five negative pulses neutral-to-earth at 90° phase

Five positive pulses neutral-to-earth at 270° phase

12.6 Test Result

Sample No. Y25070701-01						
Injected Port	AC Mains Power		Wave Type		1.2/50us-8/20us	
Pulse Interval	60s		Pulse times:		5 times at each polarity	
Operation Mode	Coupling Line	Level	Required	Observation		Result
				Positive	Negative	
Mode 4 TYPE-C	L-N	$\pm 0.5\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	L-N	$\pm 1\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	L-PE	$\pm 0.5\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	L-PE	$\pm 1\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	L-PE	$\pm 2\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	N-PE	$\pm 0.5\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	N-PE	$\pm 1\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	N-PE	$\pm 2\text{kV}$	B	A ⁽¹⁾	A ⁽¹⁾	Pass
Remark						
(1)		Operation as intend, no loss of function during test and after test.				

Sample No. Y25070701-01						
Injected Port	LAN Port		Wave Type		1.2/50us-8/20us	
Pulse Interval	60s		Pulse times:		5 times at each polarity	
Operation Mode	Coupling Line	Level	Required	Observation		Result
				Positive	Negative	
Mode 4 TYPE-C	LAN Port	$\pm 0.5\text{kV}$	C	A ⁽¹⁾	A ⁽¹⁾	Pass
Mode 4 TYPE-C	LAN Port	$\pm 1\text{kV}$	C	A ⁽¹⁾	A ⁽¹⁾	Pass
Remark						

(1) Operation as intend, no loss of function during test and after test.

13 Immunity to Conducted Disturbances, Induced by Radio-frequency Fields

13.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			



13.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Microwave Signal Generator	Rohde & Schwarz	SMB100A	103231	Feb. 17, 2025	1 Year
Audio Analyzer	Rohde & Schwarz	UPV	101525	Feb. 17, 2025	1 Year
COUPLING / DECOUPLING NETWORK	TESEQ	CDN M016	28987	Feb. 17, 2025	1 Year
RF Power Amplifiers	AR	75A250A	0332892	Feb. 17, 2025	1 Year
Directional Coupler	AR	DC2600M2	0333399	Feb. 17, 2025	1 Year
Power Meter	Rohde & Schwarz	NRVS	101785	Feb. 17, 2025	1 Year
Coaxial voltage measurement probe	Rohde & Schwarz	URV5-Z4	100215	Feb. 17, 2025	1 Year
COUPLING / DECOUPLING NETWORK	TESEQ	CDN M016	30436	Feb. 17, 2025	1 Year
Bi-Directional RF Attenuators	Bird	75-A-FFN-06	0751	N/A	N/A
COUPLING / DECOUPLING NETWORK	TESEQ	CDN T800	39134	Feb. 17, 2025	1 Year
Test Software	Rohde & Schwarz	EMC32	Ver 10.28.00	N/A	N/A

13.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-6:2023

13.4 Test Arrangement

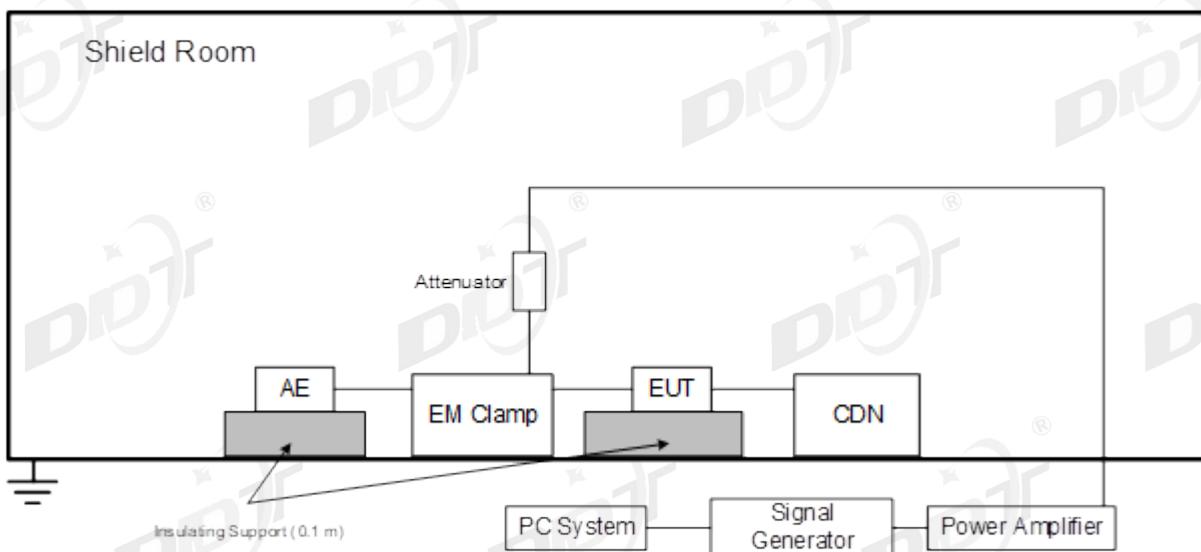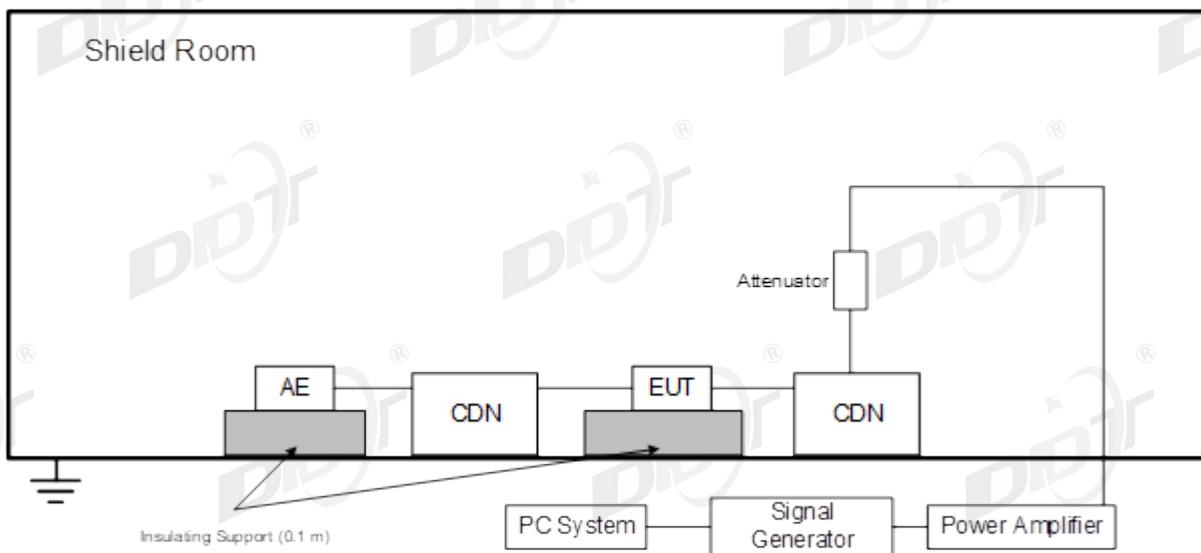

The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane at a distance 0.1 m to 0.3 m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be at least 30 mm.

The disturbance signal described below is injected to EUT through CDN.

The EUT operates within its operational mode(s).

Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

13.5 Test Specification and Limit

Test Level		Performance Criteria
Frequency and Field Strength	0.15MHz to 10MHz, 3V rms voltage level of the unmodulated signal	A
	10MHz to 30MHz, 3V to 1V rms voltage level of the unmodulated signal	
	30MHz to 80MHz, 1V rms voltage level of the unmodulated signal	
Modulation	AM modulated to a depth of 80% by a sine wave of 1kHz, (note 1)	
Step Size	1% increments	
Dwell time	<5 Sec.	

Note 1: The 1kHz modulation may be replaced by a different audio modulation frequency more appropriate for a given EUT if, for example, 1kHz is not within the operating audio range of the EUT.

For audio output function (if applied):

Performance criterion A

During the test the audio output function shall be maintained. The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be -20 dB or better.

13.6 Test Result

Sample No. Y25070701-01						
Steps: 1%		Dwell time: 1s		Modulation: 1KHz 80% AM		
Operation mode	Frequency Range	Injected Position	Level	Required	Observation	Result
Mode 4 TYPE-C	0.15MHz ~ 10MHz	AC Mains Power	3V	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	10MHz ~ 30MHz	AC Mains Power	3V ~ 1V	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	30MHz ~ 80MHz	AC Mains Power	1V	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	0.15MHz ~ 10MHz	LAN Port	3V	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	10MHz ~ 30MHz	LAN Port	3V ~ 1V	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	30MHz ~ 80MHz	LAN Port	1V	A	A ⁽¹⁾	Pass
Remark						
(1)	Operation as intend, no loss of function during test and after test.					

Audio output function result: this device without audio output function.

Method	Port	Acoustic interference ratio L1-L0 (dB) Required: ≤-20dB	Result
✓acoustic measurement	Speaker	-35.49	Pass
✓electrical measurement	Audio Out	-33.31	Pass

14 Power Frequency Magnetic Field Immunity

14.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			


14.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Multifunctional Generator	EMTEST	UCS 500N7.1	P1303110687	Feb. 17, 2025	1 Year
Motor Variac	EMTEST	MV 2616	P1303109290	Feb. 17, 2025	1 Year
Power transformer	EMTEST	MC 2630	0912-65	Feb. 17, 2025	1 Year
Magnetic Coil	EMTEST	MS 100N	0512-13	Feb. 17, 2025	1 Year
Test Software	EM TEST	iec.control	Version 5.2.3	N/A	N/A

14.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-8:2009

14.4 Test Arrangement

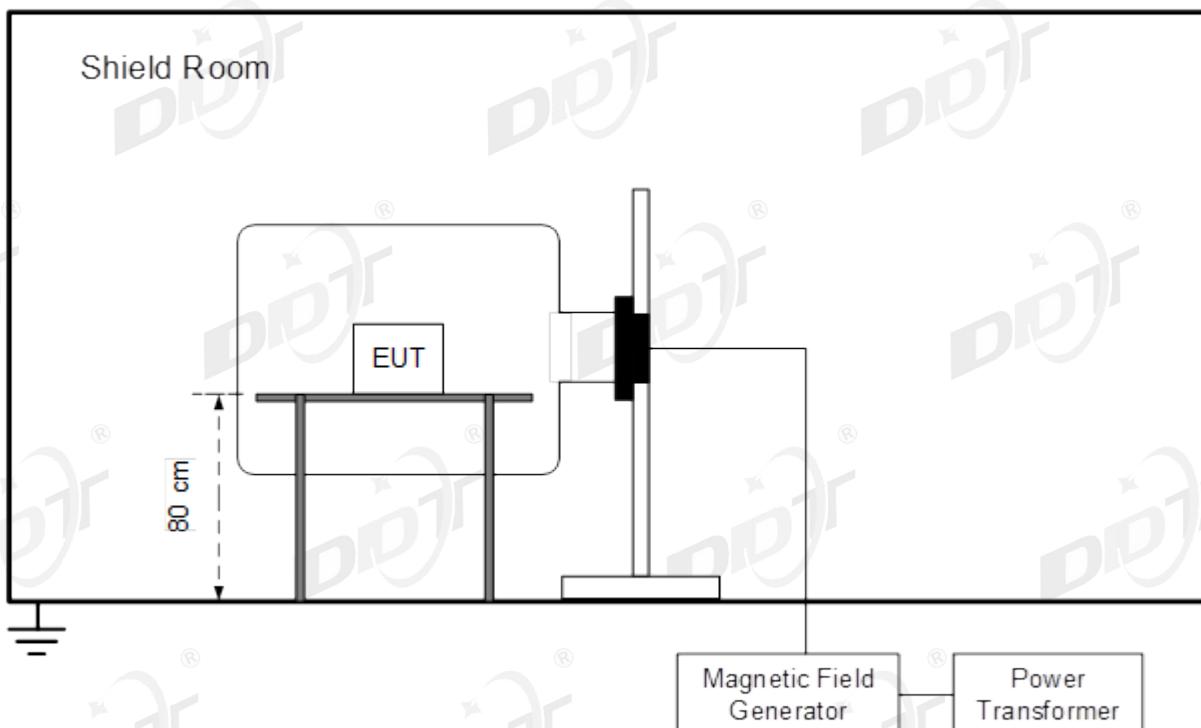

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m). Then induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

14.5 Test Specification and Limit

Magnetic Field Strength (A/m)	Performance Criterion
1	A

14.6 Test Result

Sample No. Y25070701-01						
Operation Mode	Test Level	Coil Orientation	Coil Duration	Required	Observation	Result
Mode 4 TYPE-C	1A/m	X	5 min / coil	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	1A/m	Y	5 min / coil	A	A ⁽¹⁾	Pass
Mode 4 TYPE-C	1A/m	Z	5 min / coil	A	A ⁽¹⁾	Pass
Remark						
(1)	Operation as intend, no loss of function during test and after test.					

15 Voltage Dips, Short Interruptions and Voltage Variations Immunity

15.1 General Information

Test date	Jul. 16, 2025	Test engineer	Eason Zhao	
Climate condition	Ambient temperature	24.3°C	Relative humidity	52.6%
	Atmospheric pressure	100.0kPa		
Test place	Shield Room 3#			


15.2 Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Multifunctional Generator	EMTEST	UCS 500N7.1	P1303110687	Feb. 17, 2025	1 Year
Motor Variac	EMTEST	MV 2616	P1303109290	Feb. 17, 2025	1 Year
Test Software	EM TEST	iec.control	Version 5.2.3	N/A	N/A

15.3 Reference Standard

EN 55035:2017,
 EN 55035:2017/A11:2020,
 BS EN 55035:2017+A11:2020,
 CISPR 35:2016,
 IEC 61000-4-11:2020/COR2:2022

15.4 Test Arrangement

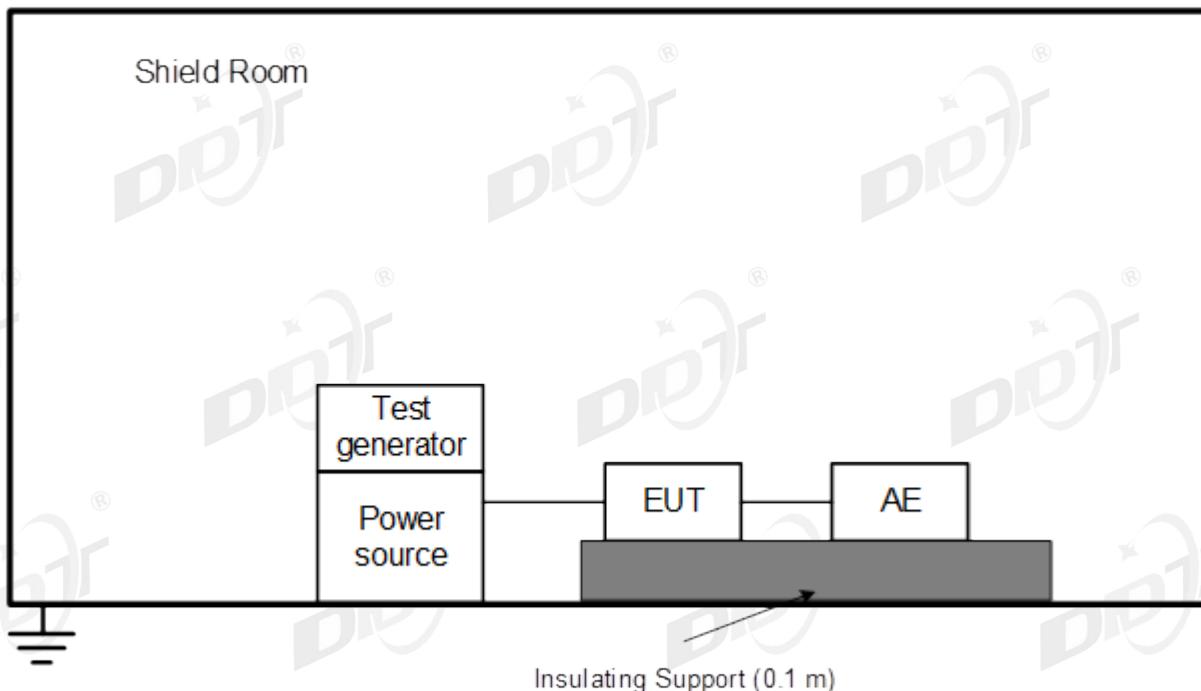

The EUT and test generator were setup as shown. The interruptions are introduced at selected phase angles with specified duration. Record any degradation of performance.

15.5 Test Specification and Limit

Test Level %UT	Duration (in period)	Performance Criterion
<5	0.5	B
70	25 for 50Hz/30 for 60Hz	C
<5	250 for 50Hz/300 for 60Hz	C

15.6 Test Result

Sample No. Y25070701-01							
Operation Mode	Operation Voltage	%Ur	Phase Angle	Duration (in period)	Required	Observation	Result
Mode 4 TYPE-C	100V 60Hz	0	0°,180°	0.5P	B	A ⁽¹⁾	Pass
Mode 4 TYPE-C	100V 60Hz	70	0°,180°	30P	C	A ⁽¹⁾	Pass
Mode 4 TYPE-C	100V 60Hz	0	0°,180°	300P	C	B ⁽²⁾	Pass
Mode 4 TYPE-C	240V 50Hz	0	0°,180°	0.5P	B	A ⁽¹⁾	Pass
Mode 4 TYPE-C	240V 50Hz	70	0°,180°	30P	C	A ⁽¹⁾	Pass
Mode 4 TYPE-C	240V 50Hz	0	0°,180°	300P	C	B ⁽²⁾	Pass
Remark							
(1)	Operation as intend, no loss of function during test and after test.						
(2)	Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention.						

Annex A. Test Setup Photos

A.1 Conducted Emissions (AC mains power ports)





A.2 Conducted Emissions (asymmetric mode)







A.3 Radiated Emissions (30MHz to 1GHz)

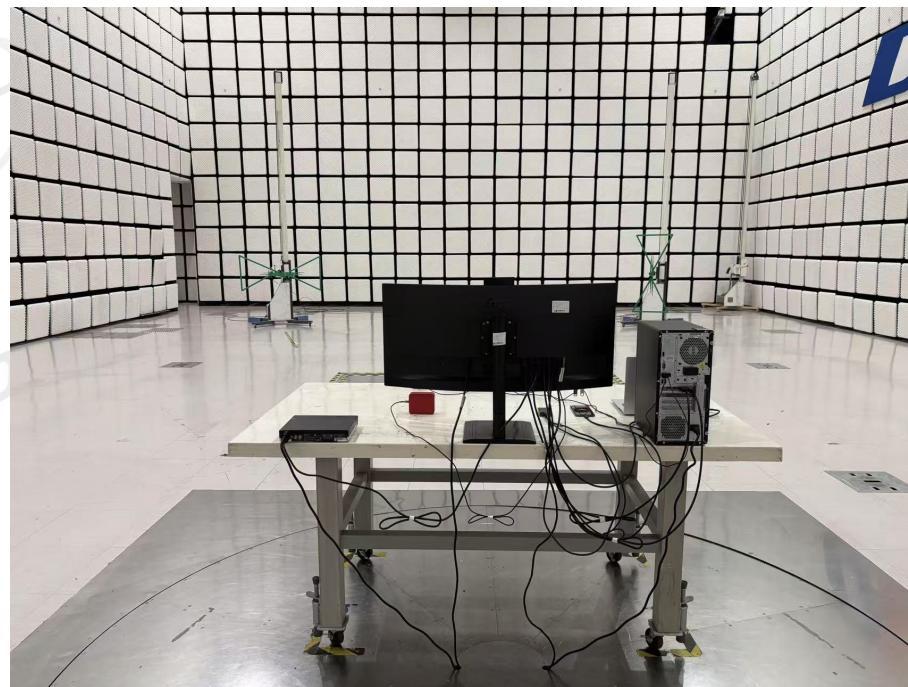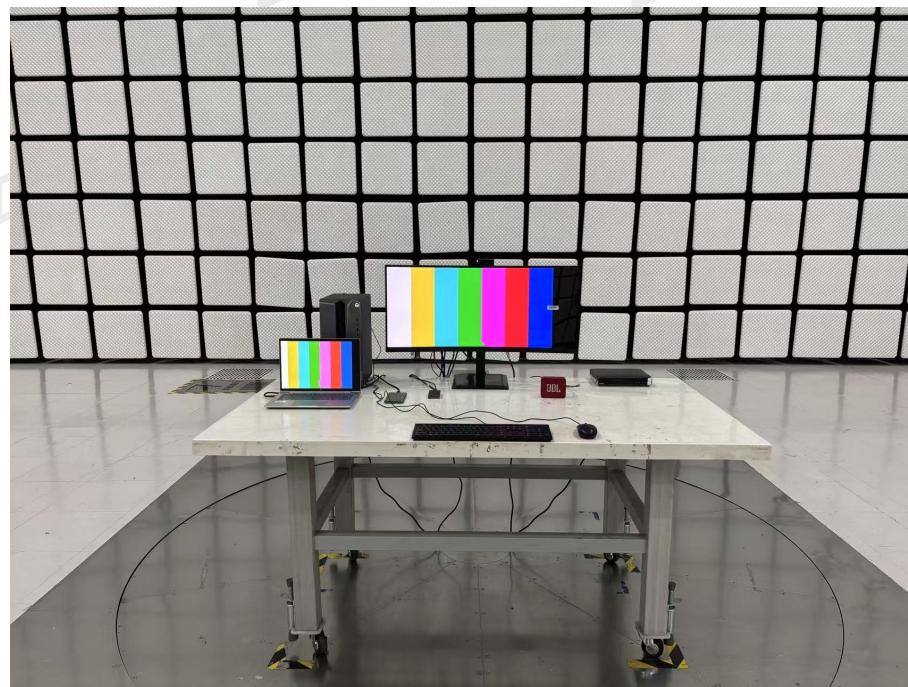

A.4 Radiated Emissions (Above 1GHz)

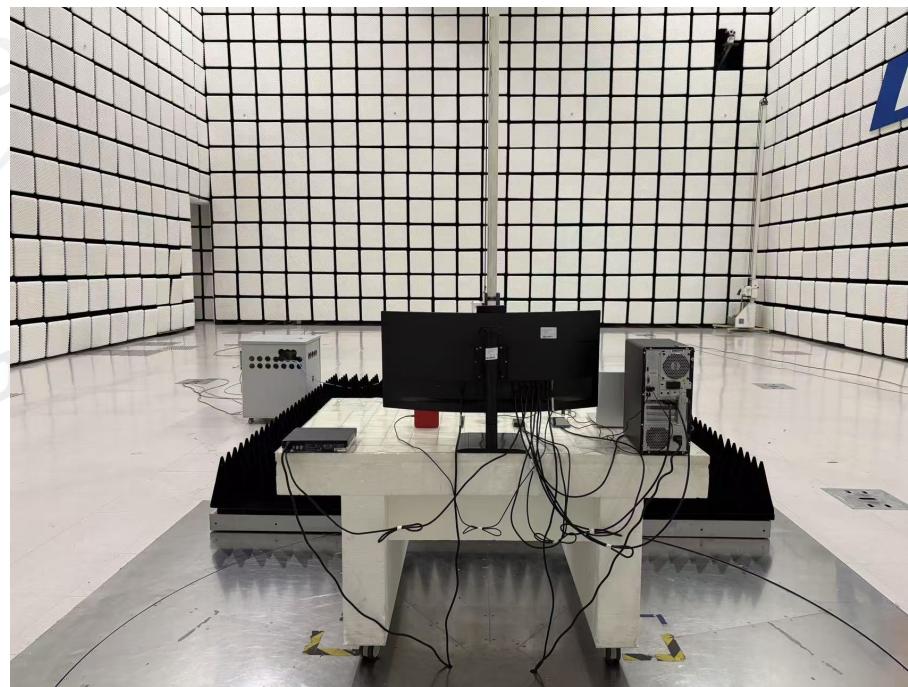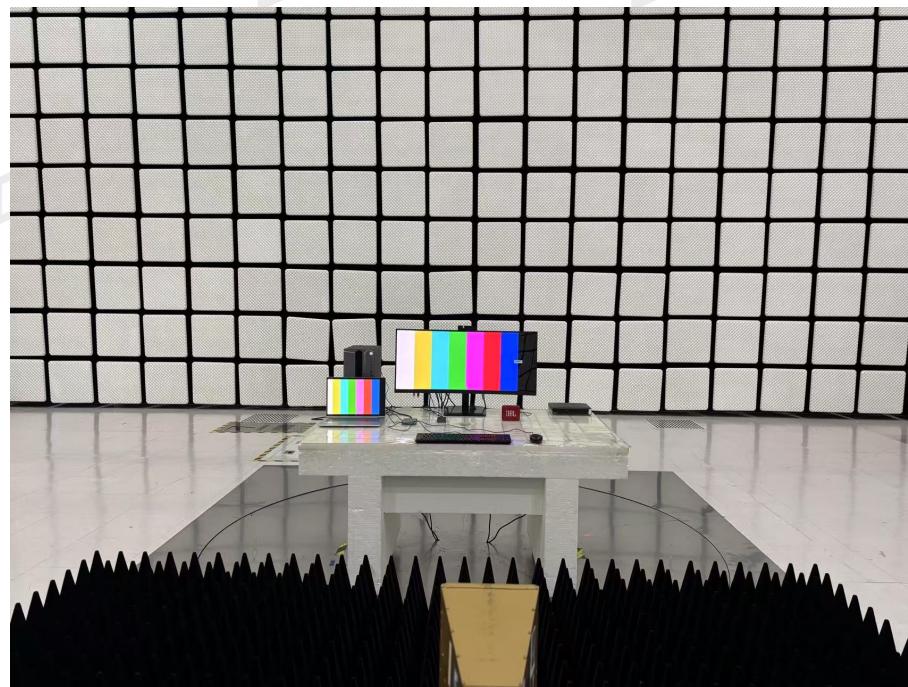

A.5 Harmonic Current Emissions





A.6 Voltage Changes, Voltage Fluctuations and Flicker




A.7 Electrostatic Discharge Immunity




A.8 Radiated, Radio-frequency, Electromagnetic Field Immunity

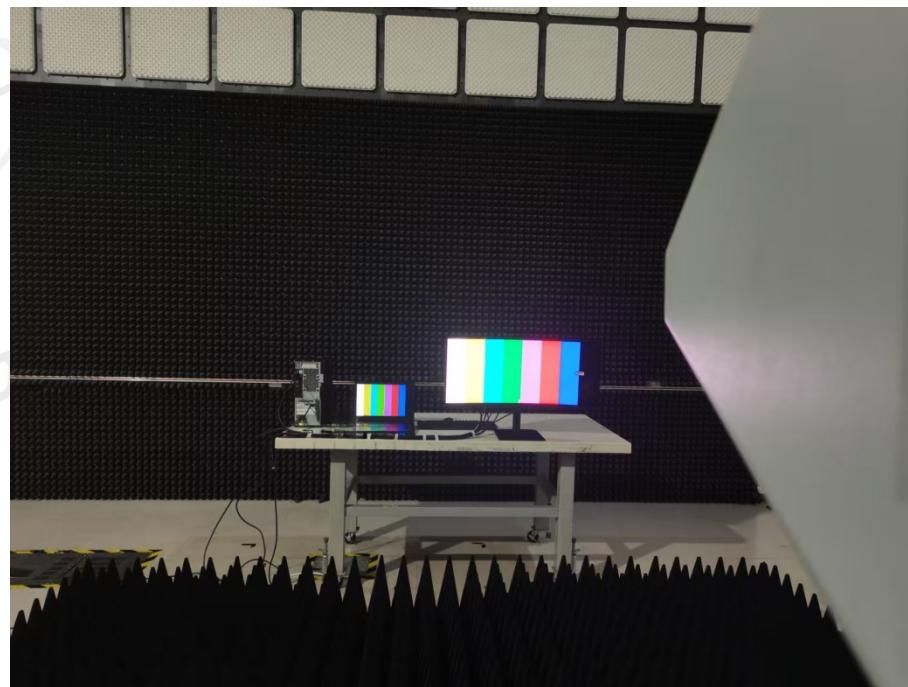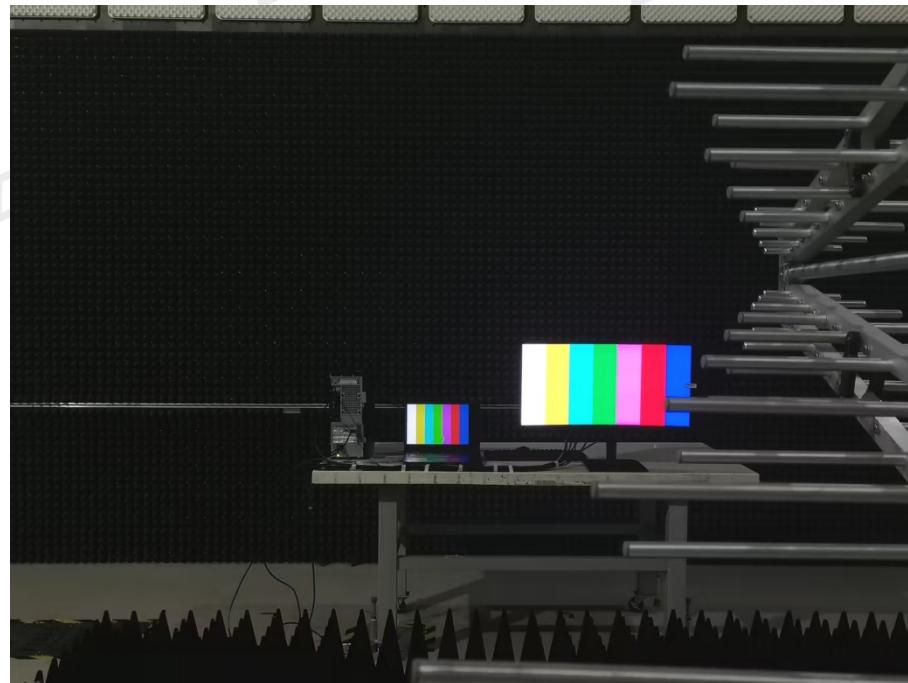



A.9 Electrical Fast Transient/Burst Immunity

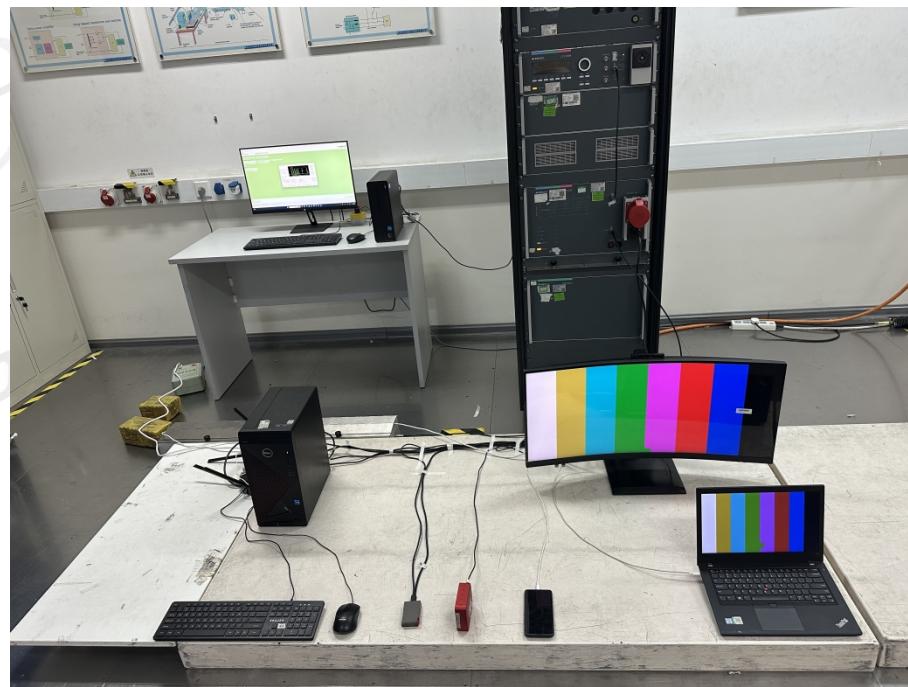

A.10 Surge Immunity

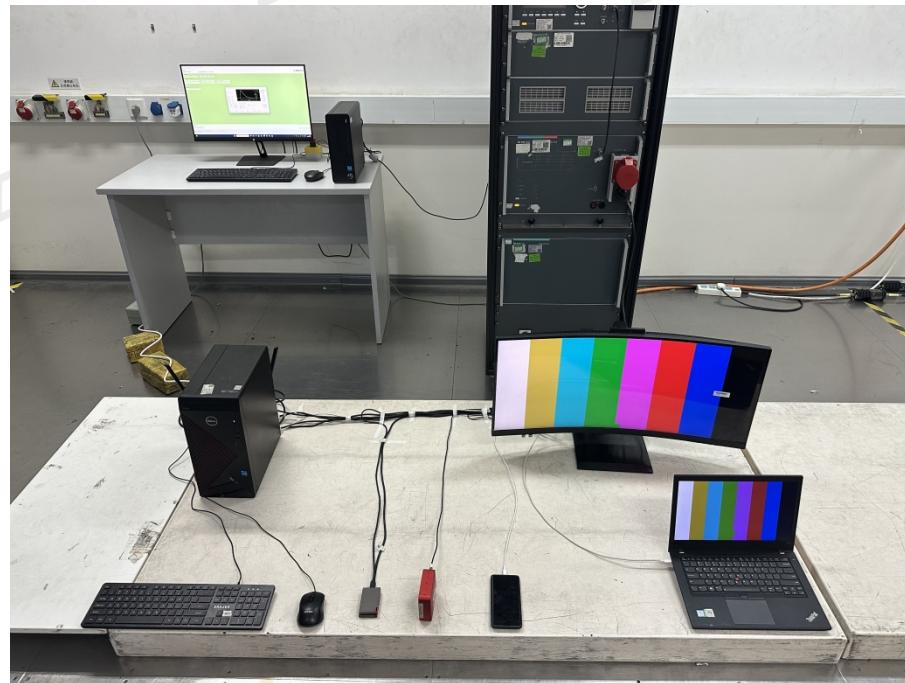


A.11 Immunity to Conducted Disturbances, Induced by Radio-frequency Fields

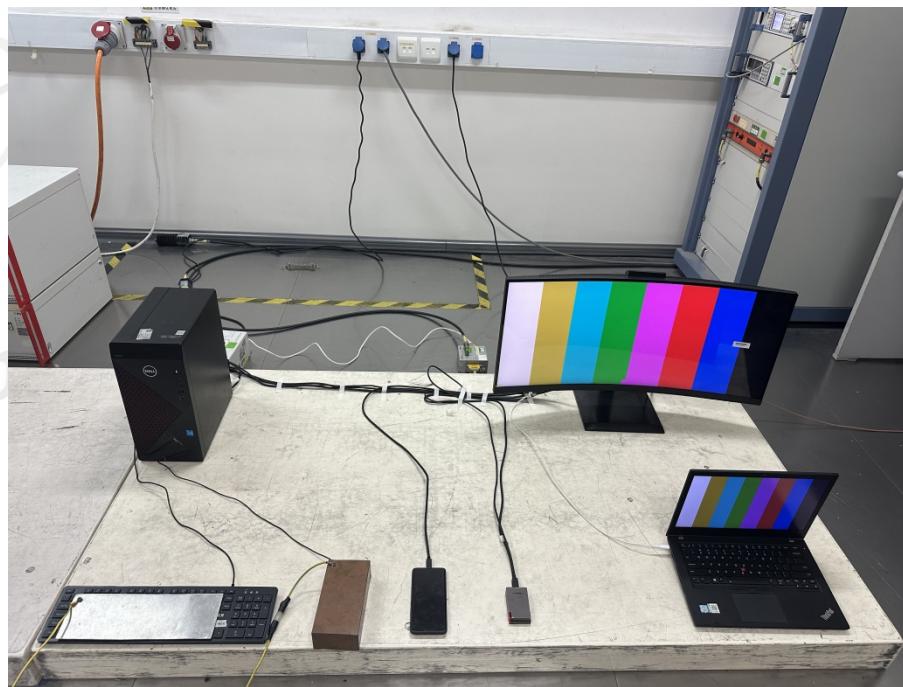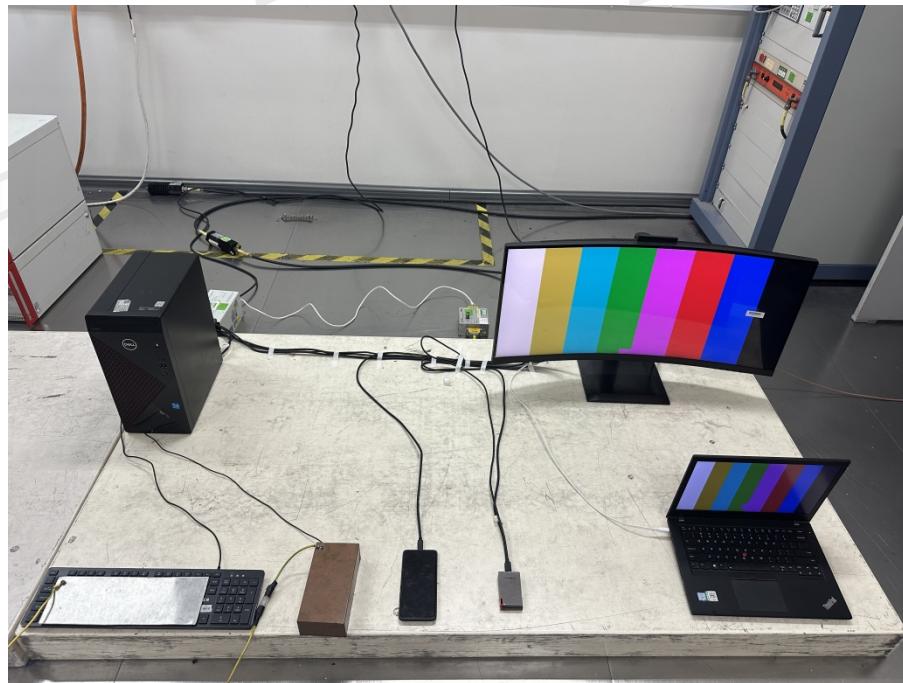

A.12 Power Frequency Magnetic Field Immunity



A.13 Voltage Dips, Short Interruptions and Voltage Variations Immunity

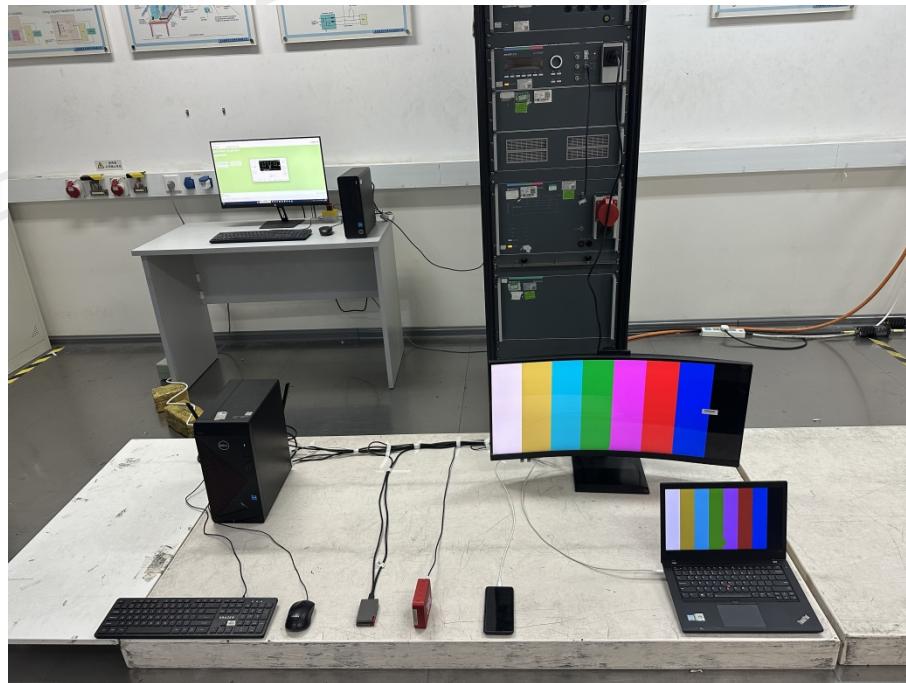

Statement

1. The report is invalid without the inspection and testing special seal of the company.
2. This report is invalid if altered.
3. This report is responsible for the conformance testing of sample(s) received.
4. This report shall not be reproduced, without the written approval of test laboratory. The copy of the report not stamped again with the inspection and testing special seal is invalid.
5. Item with “☆” was subcontracted to other laboratories.
6. The report without CMA mark has no effect on social proof.
7. Any objections must be raised to our company within 15 days on receiving the report, overdue will not be accepted.
8. The sample(s) must be collected within three months, overdue will be dealt with by our company.
9. The report is invalid without the signature of editor, reviewer, approver.

Test Laboratory: Tianjin Dongdian Testing Service Co., Ltd.

Address: Building D-1, No. 19, Weisi Road, Microelectronics Industrial Park Development Area, Tianjin, China.

Postcode: 300385

Tel: 022-58038033

Fax: 022-58038033

Website: <http://www.ddttest.com>

END OF REPORT